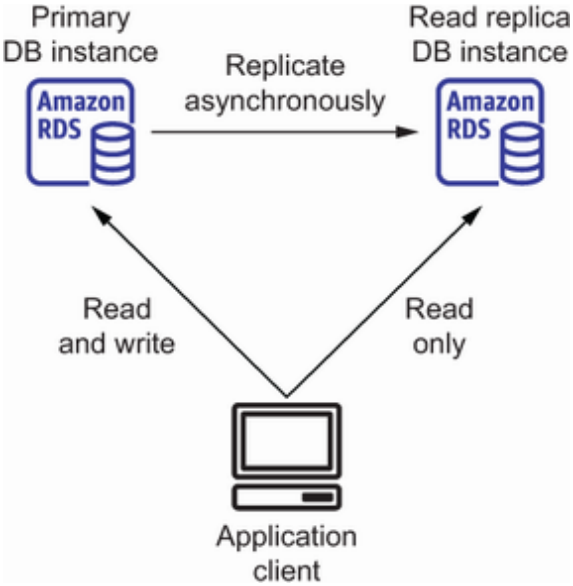


Figure 10.7 Read requests are distributed between the primary and read-replication databases for higher read performance.

Tweaking read performance with replication makes sense only if the application generates many read requests and few write requests. Fortunately, most applications read more than they write.

Creating a read-replication database

Amazon RDS supports read replication for MySQL, MariaDB, PostgreSQL, Oracle, and SQL Server databases. To use read replication, you need to enable automatic backups for your database, as shown in section 10.3.

WARNING Starting an RDS read replica will incur charges. See https://aws.amazon.com/rds/pricing/ if you want to find out the current hourly price.

Execute the following command from your local machine to create a read-replication database for the WordPress database you started in