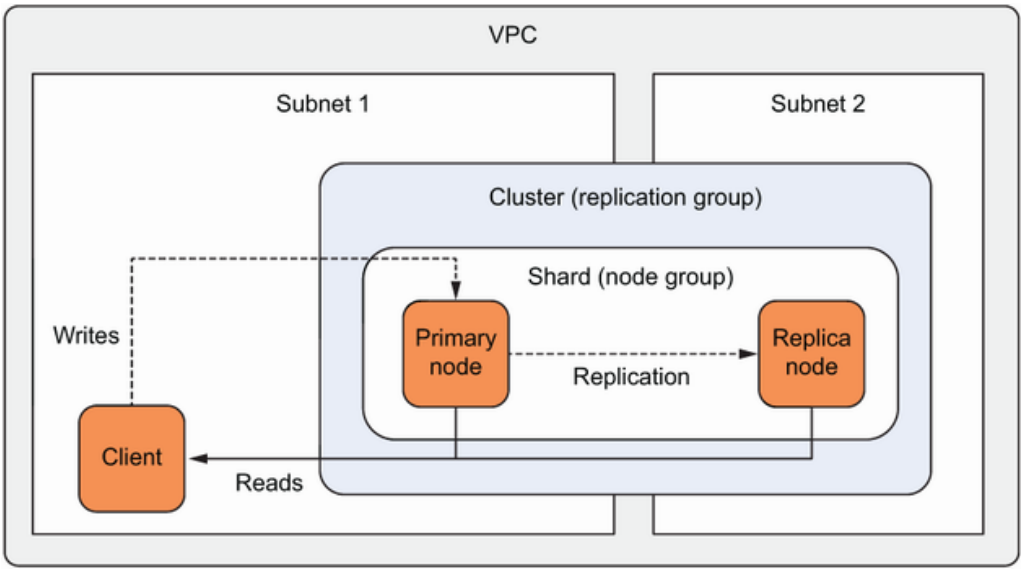


Figure 11.6 Redis deployment option: Cluster with cluster mode disabled

A Redis cluster with cluster mode disabled supports backups and data replication but not sharding. This means there is only one shard containing all the data. The primary node is synchronized to one to five replica nodes.

Use a Redis cluster with cluster mode disabled when you need data replication and all your cached data fits into the memory of a single node. Imagine that your cached data set is 4 GB in size. In that case, the data fits into the memory of nodes of type `cache.m6g.large`, which comes with 6.38 GiB, for example. There is no need to split the data into multiple shards.

11.2.4 Redis: Cluster with cluster mode enabled

A Redis cluster with cluster mode enabled, shown in figure 11.7, supports backups, data replication, and sharding. You can have up to 500 shards per cluster. Each shard consists of at least a primary node and optionally replica nodes. In total, a cluster cannot exceed 500 nodes.