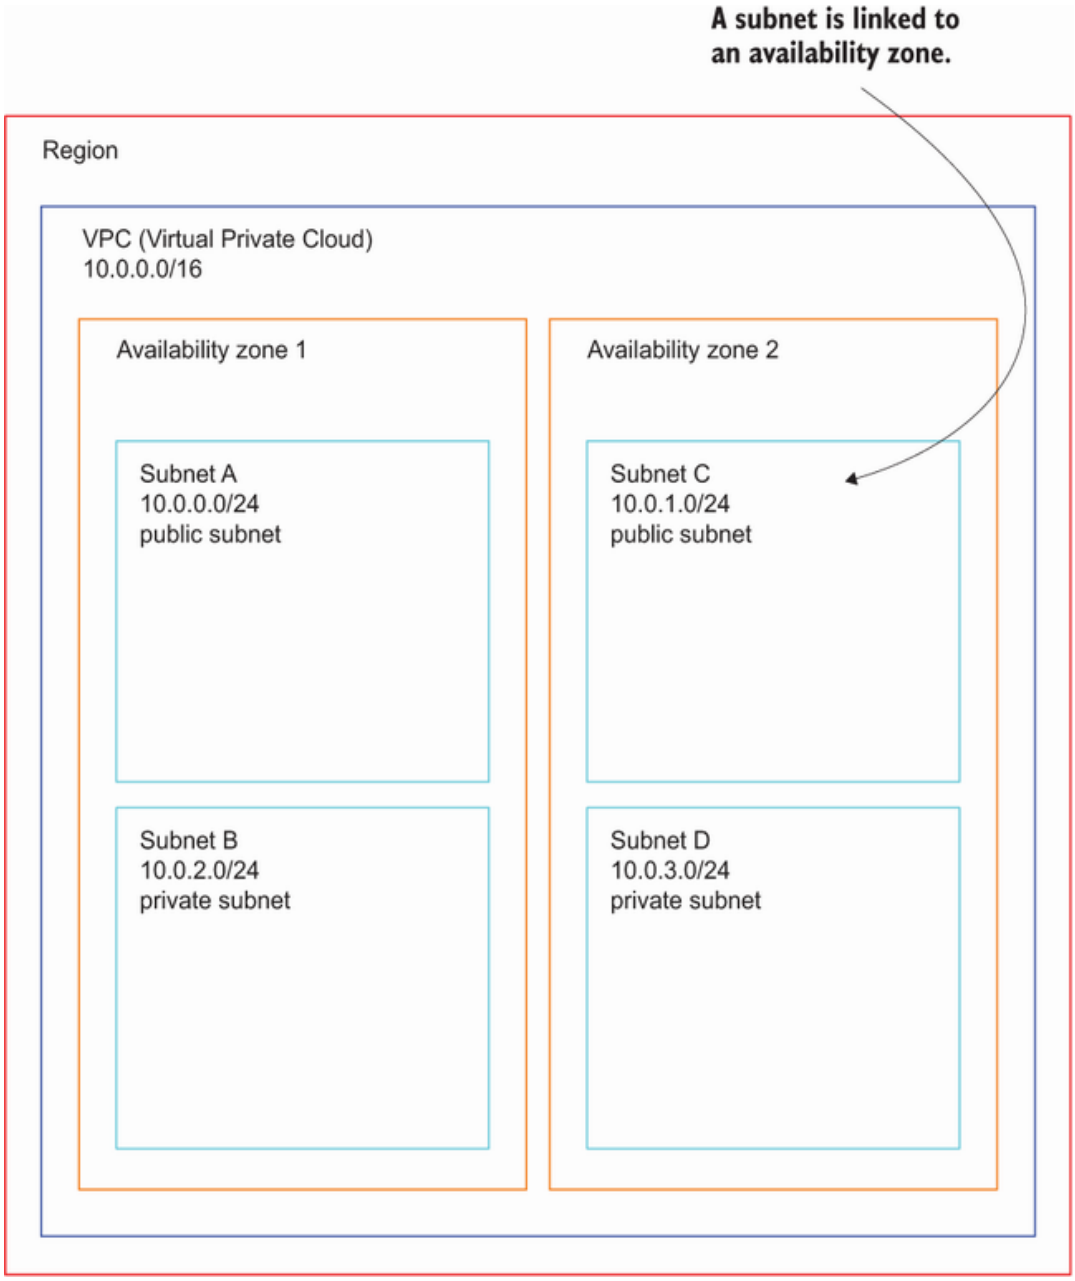


Figure 13.6 A VPC is bound to a region, and a subnet is linked to an availability zone.

You can't keep the private IP address when using autoscaling to recover from a EC2 instance or availability zone outage. If a virtual machine has to be started in another availability zone, it must be started in another subnet. Therefore, it's not possible to use the same private IP address for the new virtual machine, as figure 13.7 shows.