2. The web server puts a message into a queue that contains a random ID and the URL.
3. The web server returns a link to the user where the PNG image will be found in the future. The link contains the random ID (such as http://$Bucket.s3 .amazonaws.com/$RandomId.png).
4. In the background, a worker consumes the message from the queue.
5. The worker downloads the content and converts the content into a PNG.
6. Next, the worker uploads the image to S3.
7. At some point, the user tries to download the PNG at the known location. If the file is not found, the user should reload the page in a few seconds.

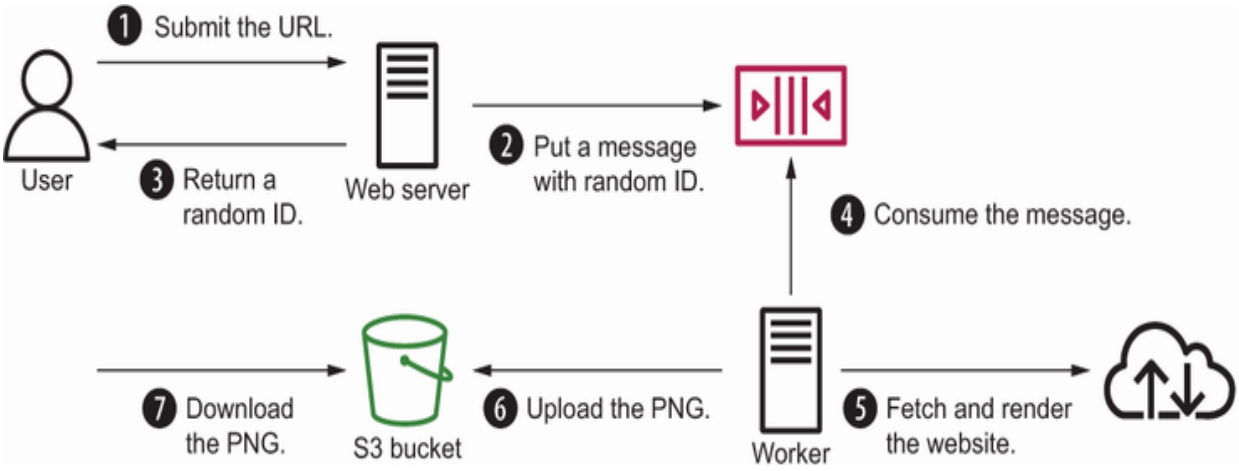


Figure 14.6 The same process, but asynchronous

If you want to make a process asynchronous, you must manage the way the process initiator tracks the process status. One way of doing that is to return an ID to the initiator that can be used to look up the process. During the process, this ID is passed from step to step.