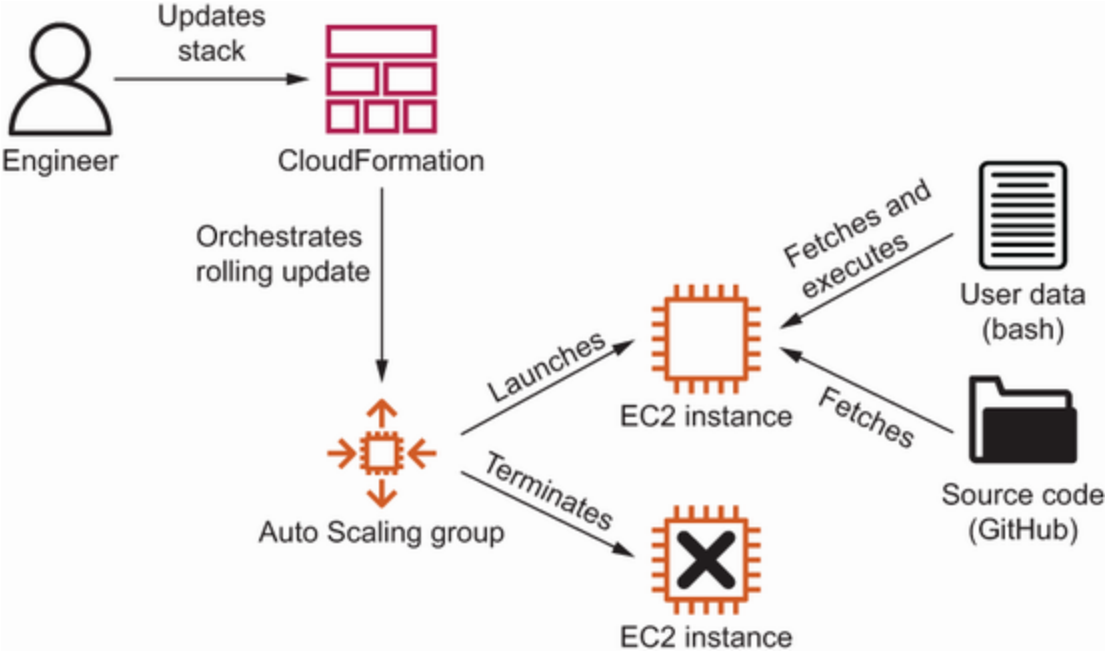


Figure 15.3 Rolling update orchestrated by CloudFormation with the help of a user data script

To get started, deploy a CloudFormation stack based on the template we prepared to deploy Etherpad, as shown next. You'll find the CloudFormation template /chapter15/ cloudformation.yaml in the book's code repository on GitHub https://github.com/AWSinAction/code3:

```
aws cloudformation deploy --stack-name etherpad-cloudformation \
➥ --template-file chapter15/cloudformation.yaml \
➥ --parameter-overrides EtherpadVersion=1.8.17 \
➥ --capabilities CAPABILITY_IAM
```

It will take about 10 minutes until the CloudFormation stack has been created and the command returns. Afterward, use the following command to get the URL of Etherpad:

```
aws cloudformation describe-stacks --stack-name etherpad-cloudformation \
➥ --query "Stacks[0].Outputs[0].OutputValue" --output text
```