⑥ Tells Express to parse the request bodies

⑦ Starts Express on the port defined by the environment variable PORT, or defaults to 8080

Don’t worry too much about the boilerplate code; the interesting parts will follow.

Creating a new Imagery process

To provide a REST API to create image processes, a fleet of EC2 instances will run Node.js code behind a load balancer. The image processes will be stored in DynamoDB. Figure 16.12 shows the flow of a request to create a new image process.

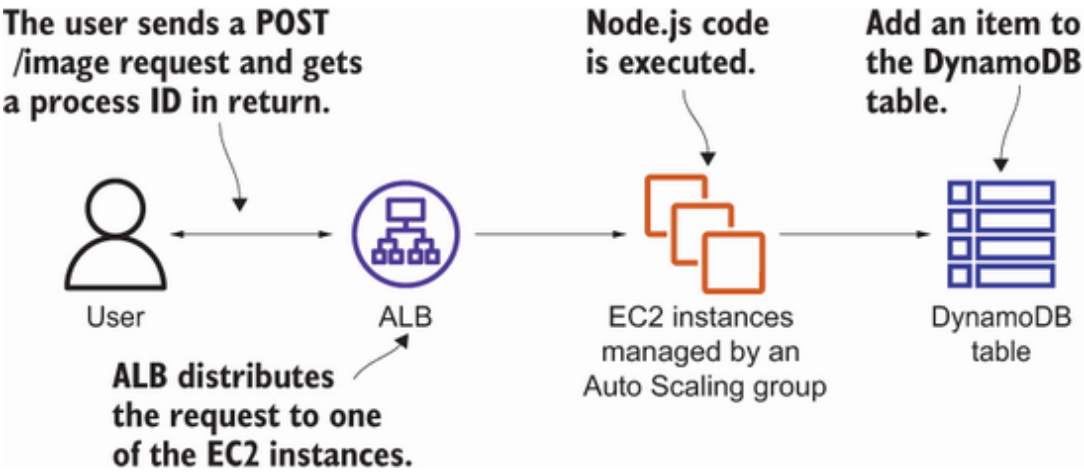


Figure 16.12 Creating a new image process in Imagery

You’ll now add a route to the Express application to handle `POST /image` requests, as shown in the following listing.

Listing 16.2 Creating an image process with `POST /image`

```
app.post('/image', function(request, response) {          ①
   const id = uuidv4();                                   ②
   db.putItem({                                           ③
```