What we like about ECS is that we can deploy all components with CloudFormation. Therefore, let's dive into the code. First, you need to create a task definition. For a better understanding, figure 18.8 shows the different configuration parts of the task definition.

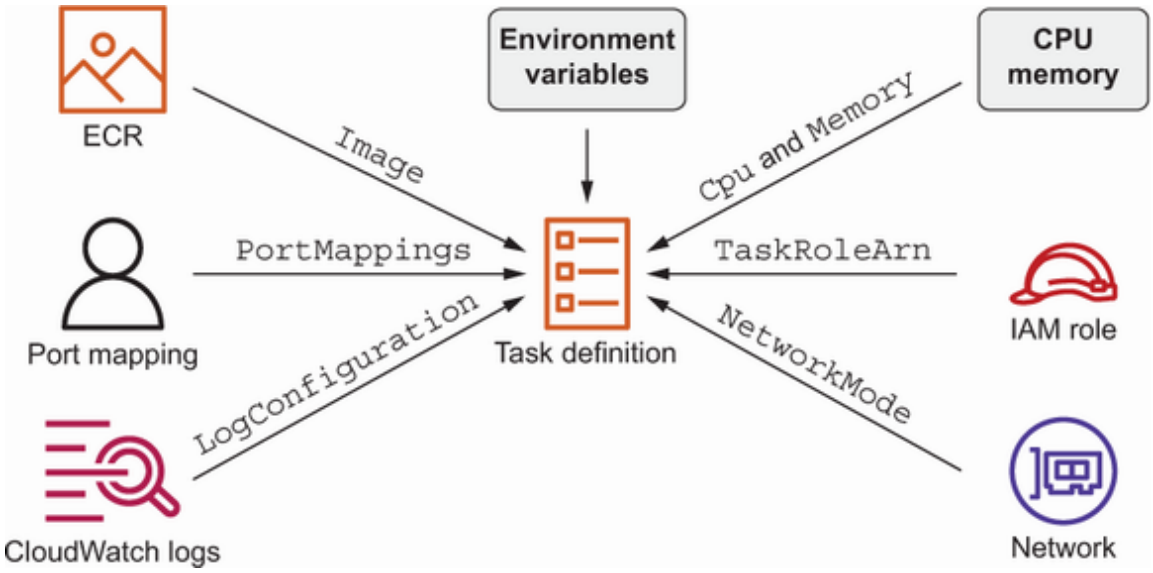


Figure 18.8 Configuring a task definition with CloudFormation

The code in the next listing shows the details.

Listing 18.4 Configuring a task definition

```
TaskDefinition:
  Type: 'AWS::ECS::TaskDefinition'
  Properties:
    ContainerDefinitions:                                    ①
    - Name: app                                              ②
      Image: 'public.ecr.aws/s5r5a1t5/notea:latest'          ③
      PortMappings:
      - ContainerPort: 3000                                  ④
        Protocol: tcp
      Essential: true
      LogConfiguration:                                      ⑤
        LogDriver: awslogs
        Options:
          'awslogs-region': !Ref 'AWS::Region'
```