represent a value to these fields, it will show the value within the field from right to left.

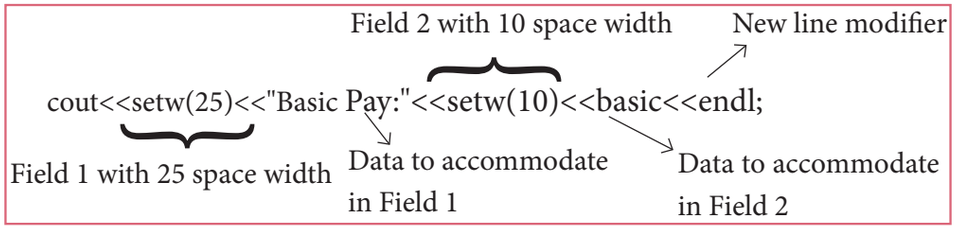


In field1 and field 2, the string "Basic Pay: " and the value of basic pay are shown as given in Figure 9.16 below.

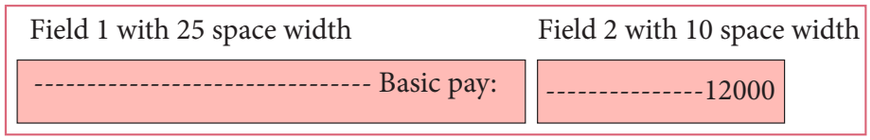


Figure 9.16 setw( ) function

**setprecision ( )**

This is used to display numbers with fractions in specific number of digits.

**Syntax:**

**setprecision (number of digits);**

**Example:**

```
#include <iostream>
#include <iomanip>
using namespace std;
int main()
{       float hra = 1200.123;
        cout << setprecision (5) << hra; }
```

In the above code, the given value 1200.123 will be displayed in 5 digits including fractions. So, the output will be **1200.1**

setprecision ( ) prints the values from left to right. For the above code, first, it will take 4 digits and then prints one digit from fractional portion.

setprecision can also be used to set the number of decimal places to be displayed. In order to do this task, you will have to set an ios flag within **setf()** manipulator. This may be used in two forms: (i) **fixed** and (ii) **scientific**

These two forms are used when the keywords fixed or scientific are appropriately used before the setprecision manipulator.

**Example:**

```
#include <iostream>
#include <iomanip>
using namespace std;
int main()
{       cout.setf(ios::fixed);
        cout << setprecision(2)<<0.1; }
```



Chapter 9 Page 115-151.indd 145 3/24/2020 9:21:05 AM