**ACTIVITY 3**

What is the size of the objects s1, s2?

```
class sum
{
        int n1,n2;
        public:
        void add(){int n3=10;n1=n2=10;}
} s1,s2;
```

## 14.4 Referencing class members

The members of a class are referenced (accessed) by using the object of the class followed by the dot (membership) operator and the name of the member.

The general syntax for calling the member function is:

**Object_name . function_name(actual parameter);**

For example consider the following illustration

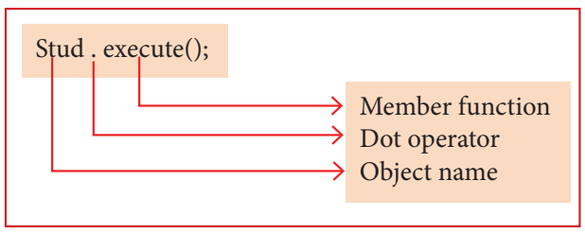


**Illustration 14.4 C++ program to illustrate the communication of object:**

```
#include<iostream>
using namespace std;
class compute
{
 int n1,n2;      //private by default
 public :
 int n;
 int add (int a, int b)   //inline member  function
 {
 int c=a+b;      //int c ; local variable for this function
 return c;
 }

}c1,c2;
int main()
{
 c1.n =c1.add(12,15); //member function is called
 c2.n =c2.add(8,4);
 cout<<"\n Sum of object-1  "<<c1.n;
 cout<<"\n Sum of object-2  "<<c2.n;
 cout<<"\n Sum of the two objects are  "<<c1.n+c2.n;
        return 0;
}
```

**Output:**

```
Sum of object-1  27
Sum of object-2  12
Sum of the two objects are  39
```

**Note**

Even an array of objects can be created for a class. It is declared and defined in the same way as any other type of array.

Example :

**student s[10];**

Where student is the class name and s[10] is 10 objects created for the student class.

## 14.5 Introduction to Constructors

The definition of a class only creates a new user defined data type. The instances of the class type should be instantiated (created and initialized) . Instantiating object is done using constructor.



Chapter 14 Page 233-248.indd 239 3/24/2020 9:23:04 AM