

The above code contains four set of **<tr>** blocks. First block of **<tr>** creates a table row with three column headings with the help of **<th>** tag. When you use **<th>** tag, the column heading were aligned center and text becomes bold by default.

Rest of the **<tr>** blocks display the contents what you specify within **<td>** tags. All the tags used with table were container tags. So, each and every tag should be closed with their closing tag. The following Figure is more useful to understand the same code given above.

The output will be:

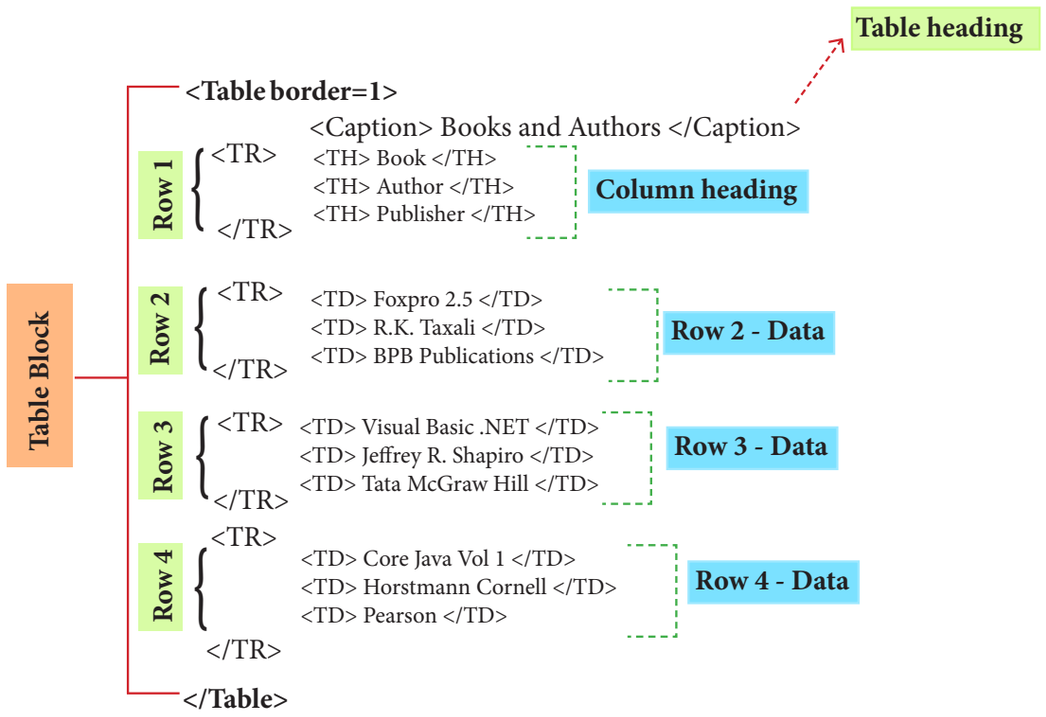

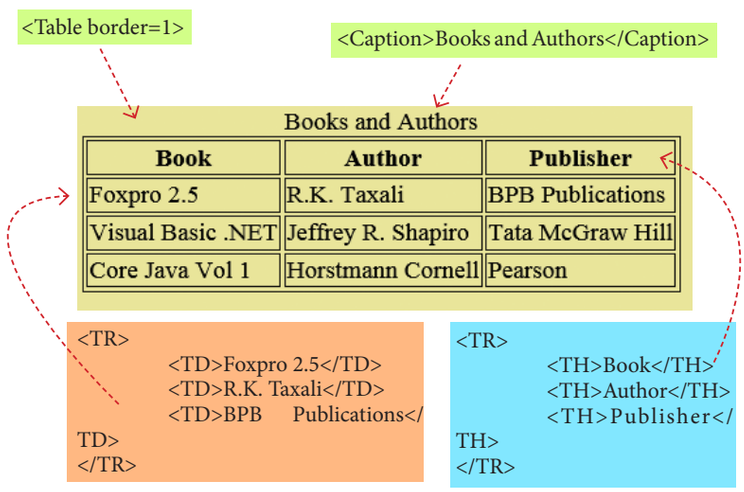

11.4.3 Attributes of table

The <table> is a container tag. There are several attributes to improve the layout of the table. They are listed below:

1. Cellspacing

It is used to set the space between cells in a table. The value should be in pixels

Chapter 11 Pages 54-92.indd 250 3/20/2020 11:42:46 AM