2. Cellpadding

It is used to set the space between the contents of a cell and its border. the value should be in pixels.

3. Border:

Border attribute with <table> tag is used to specify the thickness of the border lines around the table. The value of the border attribute should be a non zero value in pixels. If its value is zero, HTML displays the table without border. The default value is Zero in most the browsers.

4. Bordercolor:

It is used to apply the colour to the border lines.

5. Align:

It is used to set the position of the table within the browser window. Left is the default position. Right or center may be the value of align attribute.

6. BGcolor

It is used to apply background colour to the table.


7. Height and Width

These two attributes are used to specify the height and width of a table in terms of pixels or percentage.

Illustration 11.12: An HTML code to demonstrate the attributes of Table

```
<html>
<head>
<title> Table with Attribute </title>
</head>
<body>
<table cellspacing=5 cellpadding=15 border=4 bordercolor=blue align=center
bgcolor=yellow>
<TR>
        <TH> Class </TH>
        <TH> Boys </TH>
        <TH> Girls </TH>
</TR>
<TR>
        <TD> VI </TD>
        <TD> 150 </TD>
        <TD> 165 </TD>
</TR>
<TR>
        <TD> VII </TD>
        <TD> 146 </TD>
        <TD> 151 </TD>
</TR>
<TR>
        <TD> VIII </TD>
        <TD> 107 </TD>
        <TD> 110 </TD>
</TR>
</table>
</body>
</html>
```

The output will be:

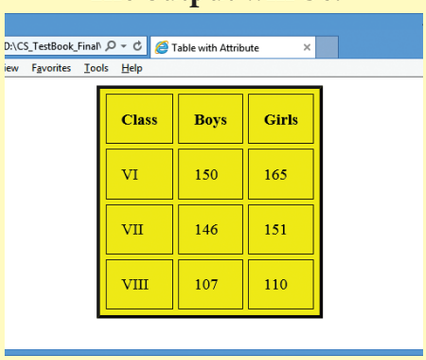

Chapter 11 Pages 54-92.indd 251 3/20/2020 11:42:47 AM