
```
<th bgcolor=yellow> Boys </th>
<th bgcolor=pink> Girls </th>
<th bgcolor=yellow> Boys </th>
<th bgcolor=pink> Girls </th>
</tr>
<tr align=center>
<th rowspan=2> XI </th>
<th> Science </th>
<td> 75 </td>
<td> 82 </td>
<td> 65</td>
<td> 96 </td>
</tr>
<tr align=center>
<th> Commerce </th>
<td> 125 </td>
<td> 147 </td>
<td> 118 </td>
<td> 163 </td>
</tr>
<tr align=center>
<th rowspan=2> XII </th>
<th> Science </th>
<td> 86</td>
<td> 97 </td>
<td> 71</td>
<td> 106 </td>
</tr>
<tr align=center>
<th> Commerce </th>
<td> 145 </td>
<td> 186 </td>
<td> 130 </td>
<td> 198 </td>
</tr>
</table>
</body>
</html>
```

The output will be:

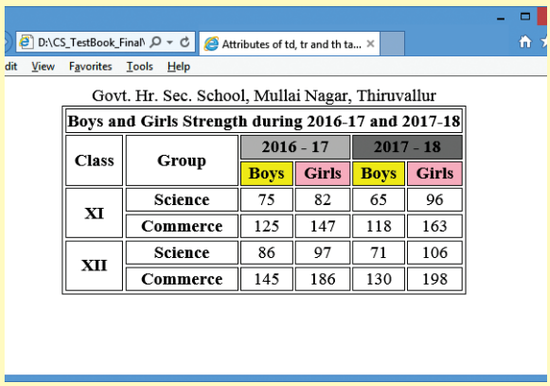

Govt. Hr. Sec. School, Mullai Nagar, Thiruvallur

Boys and Girls Strength during 2016-17 and 2017-18					
Class	Group	2016 - 17		2017 - 18	
		Boys	Girls	Boys	Girls
XI	Science	75	82	65	96
	Commerce	125	147	118	163
XII	Science	86	97	71	106
	Commerce	145	186	130	198

Lists in HTML

HTML supports three types of lists viz. numbered, unnumbered and definition. These lists are called as Ordered List, Unordered List and Definition List respectively.

1. Numbered List / Ordered List

Numbered list is created within the tag pair **<OL> ….. </OL>** tag. The tag **<LI>** is used to present the list item in the list. Ordered list displays items in a numerical or alphabetical order. Both **<OL>** and **<LI>** tags are container tags. But the usual the practice, closing tag **</LI>** never be used.

Chapter 11 Pages 54-92.indd 253 3/20/2020 11:42:47 AM