
Illustration 11.14: An HTML code to demonstrate Numbered list

```
<html>
<head>
<title> Number List </title>
</head>
<body>
<OL>
        <LI> Tamil
        <LI> Telugu
        <LI> English
        <LI> Computer Application
        <LI> Commerce
        <LI> Accountancy
        <LI> Economics
</OL>
</body>
</html>
```

The output will be:

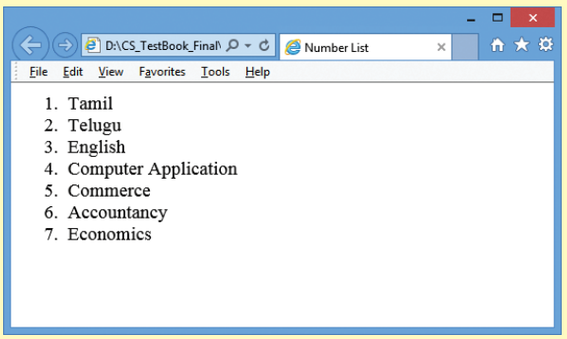

Attributes of Ordered List:

There are two attributes can be used to customize ordered list, they are

(1) Type - changing numbering style

(2) Start - changing numbering order.

Type – is used to change the number style. The default number style is standard Arabic numerals (1,2,3,……).

Table: 11.3

Type value	Numbering style
1	Standard Arabic Numerals 1,2,3,4,……
a	Lowercase letters a, b, c, d, ……
A	Uppercase letter A, B, C, D ……..
i	Lowercase Roman numerals i, ii, iii, iv, v ……
I	Uppercase Roman numerals I, II, III, IV, V ……..

Start – is used to specify the number of letter with which start the list. The default starting point is 1. The value of the start attribute should be a decimal number, regardless of the numbering style being used.

Chapter 11 Pages 54-92.indd 254 3/20/2020 11:42:47 AM