
The output will be:

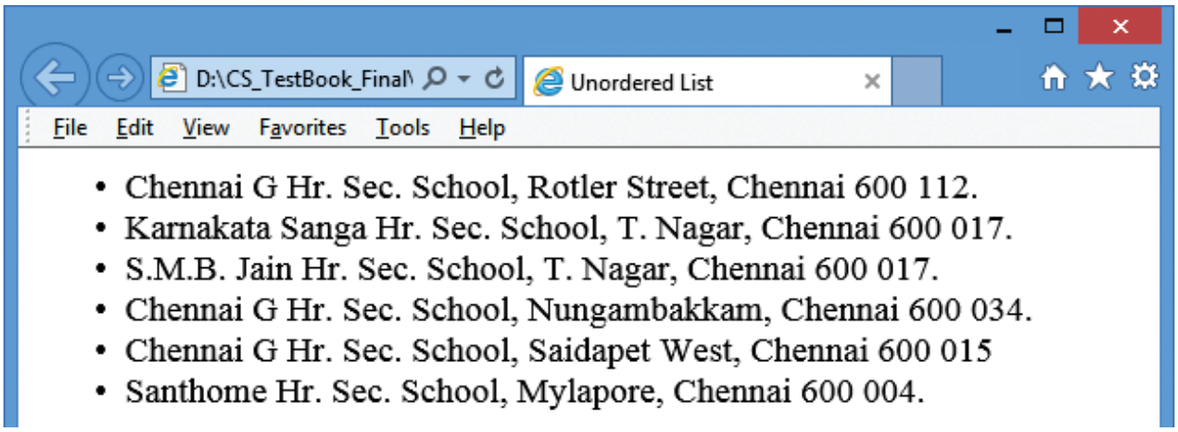

Attribute of Unordered List:

Like ordered list, **type** attribute is used to customize bullet style for the list of elements. By default, a solid circle is used as bullets.

Table: 11.4

Type value	Numbering style
Disc	• A solid circle
Square	■ A solid square
Circle	oAn unfilled circle

Illustration 11.17: An HTML code to demonstrate Unordered list

```
<html>
<head>
<title> Attribute of UL tag </title>
</head>
<body>
        <UL>
                <LI> Chennai G Hr. Sec. School, Rotler Street, Chennai 600 112.
                <LI> Karnakata Sanga Hr. Sec. School, T. Nagar, Chennai 600 017.
        </UL>
        <UL type=square>
                <LI> S.M.B. Jain Hr. Sec. School, T. Nagar, Chennai 600 017.
                <LI> Chennai G Hr. Sec. School, Nungambakkam, Chennai 600 034.
        </UL>
        <UL type=circle>
                <LI> Chennai G Hr. Sec. School, Saidapet West, Chennai 600 015
                <LI> Santhome Hr. Sec. School, Mylapore, Chennai 600 004.
        </UL>
</body>
</html>
```


Chapter 11 Pages 54-92.indd 256 3/20/2020 11:42:47 AM