Name:

This attribute of <input> tag is used to assign a name to the input controls. When the form is submitted, the data values are passed to the server along with the names of the controls.

Value:

This attribute is used to define default value to some controls.

Size:

This is used to set the width of the input text in terms of characters. It is applicable only for textbox and password boxes.


Maxlength:

This attribute of <input> tag is used to set the length of the input character (number of characters to be inputted) to the textbox and password boxes.

Illustration 12.7: An HTML code to demonstrate Form and Form controls (Login form)

```
<html>
<head>
        <title> Login Form </title>
<body>
<h3 align=center> TamilNadu State Council of Educational Research and Training, Chennai </h3>
<Form Action = "mailto:abcd.xyz@com" method=post>
        <p> User Name:
        <Input type = text   name="user_name"  size = 20   maxlength = 15> </p>
        <p> Password:
        <Input type = password  name="pass"  size = 20   maxlength = 15> </p>
        <Input type = reset   value = "Clear">
        <Input type = submit  value = "Login">
</Form>
</body>
</html>
```

The output will be:

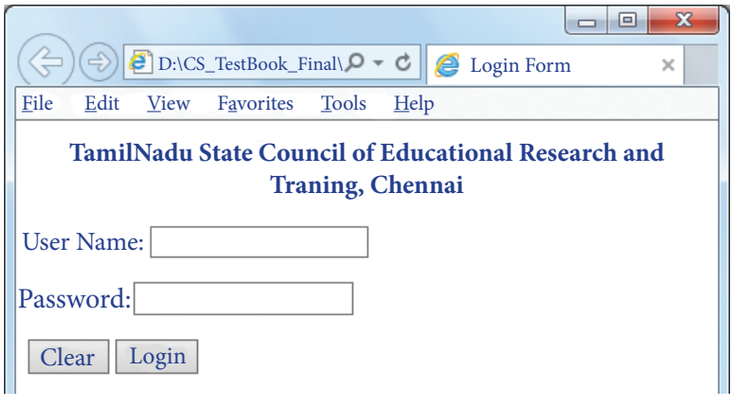

Note: Data received from the user can send to receiver through mail using "mailto" action.

Chapter 12 Pages 93-115.indd 277 3/20/2020 11:43:04 AM