CSS - Cascading Style Sheets

Learning Objectives:

After learning this chapter, the student will be able to


- Understand the uses of CSS
- How to create separate CSS Files to format various elements of HTML
- How to use a CSS file in HTML 9.1 Necessity of Internet

Introduction:

In the previous chapters we discussed about the variety of HTML tags and the attributes to design a webpage. As you already know about the formatting tags and its attributes, in some situations, you may need to use a tag uniformly in the entire document. To do so, we can use <style> tag. A style tag is used to change the default characteristics of a particular tag inthe entire web document wherever that tag is used.

For example, if you want to display **<h3>** tag in a particular font style and size with blue colour in the entire page,You can use **<style>** tag to define its properties in head section as follows.

```
<html>
<head>
<title> Usage of the <style> tag </title>
<style>
        h3
        { color:blue;
        font-family: "Copperplate Gothic Bold";
        font-size:14pt; }
</style>
</head>
<body>
<h3> Welcome to learn HTML </h3>
<h3> Welcome to learn CSS </h3>
<h3> Welcome to lean JavaScript </h3>
</body>
<html>
```

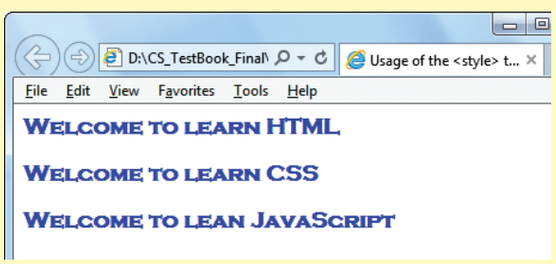

In the above code segment, the style of **<h3>** header tag is clearly defined. So, hereafter, the content between **<h3>** and **</h3>** will be displayed as per its definition.The output of the above code is shown as below:

The **<style>** tag controls the presentation styles of a particular HTML document.

Chapter 13 Pages 116-126.indd 286 3/20/2020 11:43:20 AM