
Output

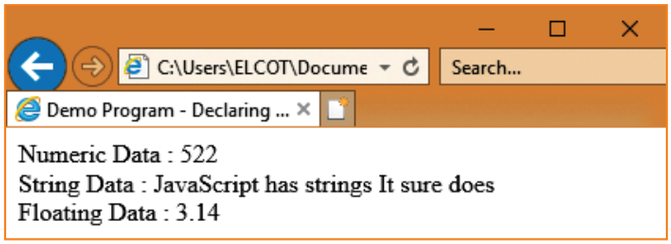

In addition, multiple variables can be declared with one **var** statement, if the variables are separated by commas:

var no1=50, no2=5065;

JavaScript allows the implicit declaration of variables by using them on the left-hand side of an assignment. In JavaScript there is no need to indicate data type during variable declarations. JavaScript variables are untyped and it is dynamically datatyped which means initially you can assign a value of any data type to a variable and later you can assign a value of different data type to the same variable. For example:

var value=100;

var value=”JavaScript”;

14.5.5 JavaScript Literals

A literal is a fixed value given to a variable in source code. Literals are often used to initialize variables. Values may be Integer, Floating point, Character, String and Boolean. For Example,

var int_const=250; //Integer constant//

var float_const=250.85; //Floating point constant//

var char_const=’A’; //Character constant//

var string_const=”Raman”; //String constant//

var boolean_const=true; //Boolean constant//

write statement:

General Syntax:

document write ("string " + var);

14.5.6 Type casting in JavaScript.

Type conversion is the act of converting one data type into a different data type which is also called as casting. In JavaScript there are two type of **casting,**

- Implicit casting and
- Explicit casting

Implicit casting occurs automatically in JavaScript when you change the data stored in a variable:

Chapter 14 Pages 127-153.indd 298 3/20/2020 11:44:36 AM