
```
        var value1 = 522, value2=10;
        document.write("<br>Data1 : "+value1);
        document.write("<br>Data2 : "+value2);
        var sum = value1+value2;
        var diff = value1-value2;
        var prod = value1*value2;
        var res = value1/value2;
        var rem = value1%value2;
        document.write("<br><br>The Sum of Data1 and Data2 : "+sum);
        document.write("<br>The  Difference of Data1 and Data2 : "+diff);
        document.write("<br>The Product of Data1 and Data2 : "+prod);
        document.write("<br>The Result after Division of Data1 and Data2 : "+res);
        document.write("<br>The Remainder after Division of Data1 and Data2 :
"+rem);
</script>
</Body>
</Html>
```

Output:

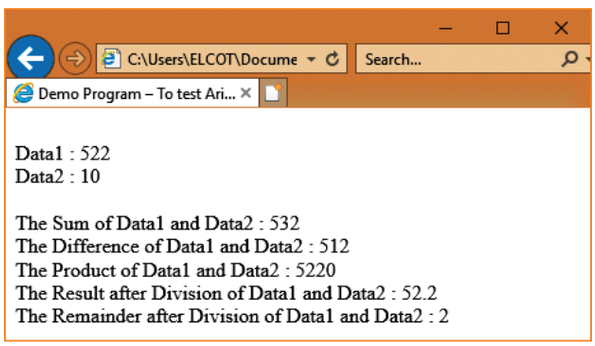

14.6.2 Assignment Operator

An assignment operator is the operator used to assign a new value to a variable. Assignment operator can also be used for logical operations such as bitwise logical operations or operations on integral operands and Boolean operands.

In JavaScript = is an assignment operator, which is used to assign a value to a variable. Often this operator is used to set a variable to a literal value, for example,

```
var number1=10;
var number2=number1;
var name=”Computer Science”;
var booleanvar=true;
```

The assignment operator is used to assign a value to a single variable, but it is possible to perform multiple assignments at once by stringing them together with the = operator. For example, the statement

Chapter 14 Pages 127-153.indd 300 3/20/2020 11:44:36 AM