
Illustration 14.5 Using Relational Operators

```
<Html>          <Head>
<Title>Demo Program - To test Relational(Comparison) Operators in JavaScript </Title>
</Head>         <Body>
        <script language="javascript" type="text/javascript">
        var value1 = 522, value2=10;
        document.write("<br>Data1 : "+value1);
        document.write("<br>Data2 : "+value2);
        document.write("<br><br>Whether Data1 = Data2 : "+(value1==value2));
        document.write("<br>Whether Data1 < Data2 : "+(value1<value2));
        document.write("<br>Whether Data1 > Data2 : "+(value1>value2));
        document.write("<br>Whether Data1 <= Data2 : "+(value1<=value2));
        document.write("<br>Whether Data1 >= Data2 : "+(value1>=value2));
        document.write("<br>Whether Data1 != Data2 : "+(value1!=value2));   </script>
</Body>   </Html>
```

Output:

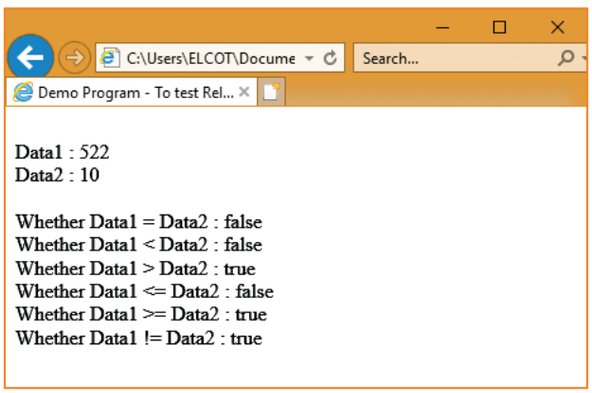

14.6.4 Logical Operators:

Logical operators perform logical (boolean) operations. Logical operators combine or invert boolean values. Once comparisons are made, the logical operators && (AND), || (OR) and ! (NOT) can be used to create more complex conditions.

Table: 14.4 Logical or Boolean operators

Logical Operator	Example	Meaning	Result
&&	((4<5) && (10>5)) ((expr1) && (expr2))	(Logical AND) Returns true if expr1 and expr2 both true.	True
||	((4<5) || (10>5)) ((expr1) || (expr2))	(Logical OR) Returns true if either expr1 or expr2 is true, or both are true.	True
!	!(10>5) !(expr1)	(Logical NOT) Returns true if expr1 is false; otherwise, returns false.	False

Chapter 14 Pages 127-153.indd 303 3/20/2020 11:44:36 AM