Usage :


Best practice is to use logical operators on boolean operands. However, operands of any type can be combined. The strict rules are as follows:

- For && (AND) the result is false if the first operand is false; otherwise, the result is the Boolean value of the second operand.
- For || (OR) the result is true if the first operand is true; otherwise, the result is the Boolean value of the second operand.
- For ! (NOT) the result is true if the operand is false; otherwise, the result is true.

Illustration 14.6 Using Logical Operators

```
<Html>
<Head>
        <Title>Demo Program - To test Logical Operators in JavaScript </Title>
</Head>
<Body>
<script language="javascript" type="text/javascript">
        var value1 = 522, value2=10;
        document.write("<br>Data1 : "+value1);
        document.write("<br>Data2 : "+value2);
        var res1=((value1>100) && (value1>601));
        var res2=((value1>100) || (value1>601));
        var res3=(!(value1!=value2));
        document.write("<br><br>Whether Data1>100 AND Data1>601 : "+res1);
        document.write("<br><br>Whether Data1>600 OR  Data1>601 : "+res2);
        document.write("<br>Whether !Data1 != Data2 : "+res3);
</script>
</Body>
</Html>
```

Output:

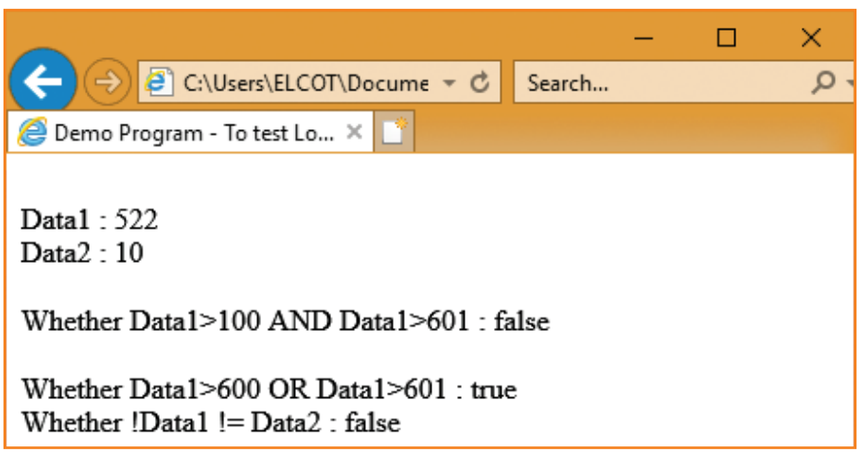

Chapter 14 Pages 127-153.indd 304 3/20/2020 11:44:36 AM