
Output:

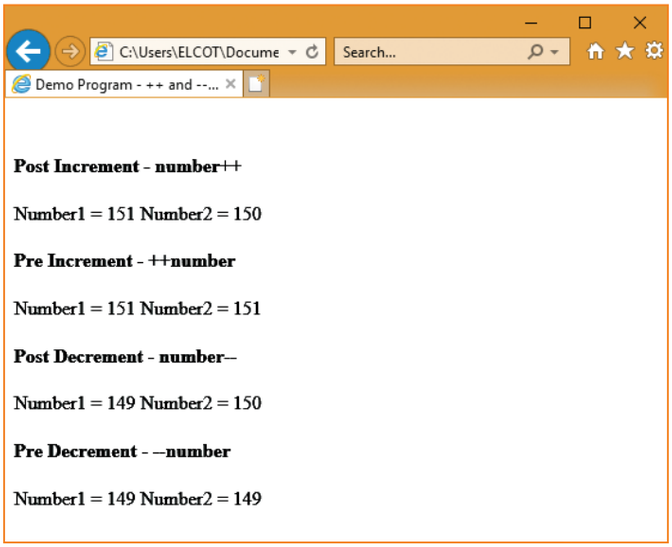

14.6.7 Unary + and - Operator:

+ has no effect on numbers but causes non-numbers to be converted into numbers

– Negation (changes the sign of the number or converts the expression to a number and then changes its sign)

14.6.8 typeof Operator:

The **typeof** operator is used to get the data type (returns a string) of its operand. The operand can be either a literal or a data structure such as a variable, a function, or an object. The operator returns the data type.

Syntax

typeof operand

or

typeof(operand)

typeof returns: boolean, function, number, string, and undefined. The following table summarizes possible values returned by the typeof operator.

Table: 14.5

Type of Operand	Result
Number	“number”
Boolean	“Boolean”
String	“string”
Functions	“function”
Undefined	“undefined”

Chapter 14 Pages 127-153.indd 307 3/20/2020 11:44:36 AM