
The output will be

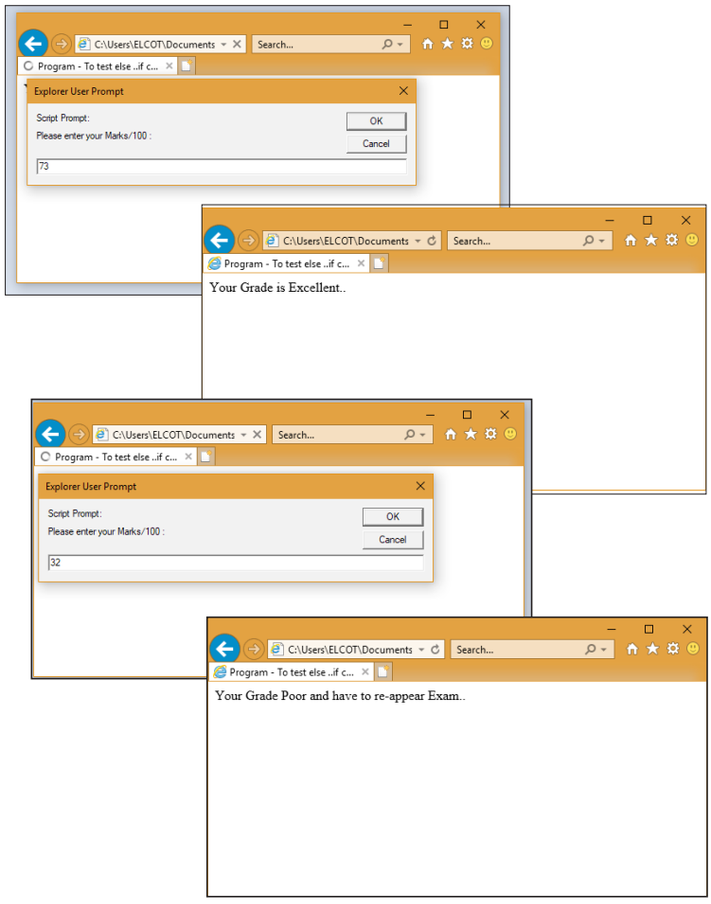

There is nothing special about this code. It is just a series of **if** statements, where each following **if** is a part of the **else** clause of the previous statement. Using the else if idiom is preferable to, and more legible than, writing these statements out in their syntactically equivalent, fully nested form:

```
if (n == 10)
{       // Execute code block #1     }
else
{       if (n == 20)
        {       // Execute code block #2     }
        else
        {
                if (n == 30)
                {       // Execute code block #3     }
                else
                {       // If all else fails, execute block #4  }
        }
}
```


Chapter 15 Pages 154-175.indd 319 3/20/2020 11:44:53 AM