15.2.2 break and continue statement

JavaScript also supports statements used to modify flow control, specifically **break** and **continue**. The **break** statement will terminate the loop early. For example,


```
for(var n=0;n<=10;n++)
{       if(n==5)
        {       break;          }
        document.write(n+"<br>");
}
```

In the above example, which writes out the value of n starting from 0, when n is equal to 5 the break statement is executed and the loop is terminated and the output is as follows,

Illustration 15.6 Using break statement

```
<Html>
  <Head>
     <Title>Demo Program - To test Break command in JavaScript </Title>
  </Head>
 <Body>
   <script language="javascript" type="text/javascript">
   document.write("<h2> Using Break Statement </h2>");
    for( var no2=0;no2<=10;no2++)
    {
     if(no2==5)
     {break;}
     document.write(no2+" ");
    }
    </script>

 </Body>
</Html>
```

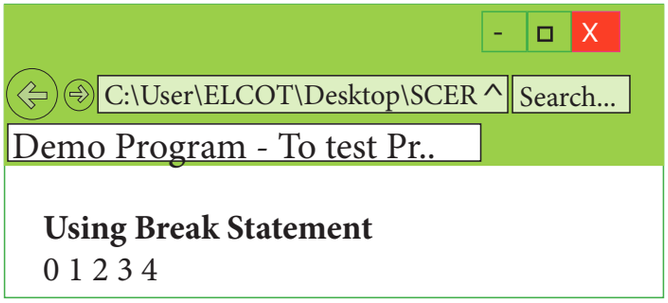

The **continue** statement will skip back to the loop condition check. When the **continue** statement is executed, the current iteration of the enclosing loop is terminated, and the next iteration begins. For example,

Chapter 15 Pages 154-175.indd 324 3/20/2020 11:44:53 AM