

Listing 16.3 Using Function (on-line quiz)

```
<html>
<head>
<title>On-line Quize</title>
<script type="text/JavaScript">
function checkAnswer()
{
        //var myQuiz=document.getElementById("myQuiz");
        if ( document.getElementById("myQuiz").elements[0].checked)
        alert("Congratulations, Your Answer is correct");
        else
        alert("Your Answer is incorrect, Please try Again");
}
</script>       </head>
<body>
<form id="myQuiz"  action="JavaScript:checkAnswer()">
<p> Which is not a Programming Language: <br>
<input type="radio" name="radiobutton" value="Word" />
<label> MS-Word</label>
<input type="radio" name="radiobutton" value="Cobol" />
<label> COBOL</label>
<input type="radio" name="radiobutton" value="CPP" />
<label> C++</label>
<input type="radio" name="radiobutton" value="VB" />
<label>Visual BASIC</label><br><br>
<input type="submit" name="submit" value="Submit" />
<input type="reset" name="reset" value="Reset" />
</p>   </form>        </body>        </html>
```

Output:

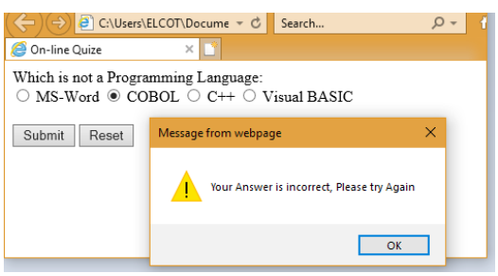

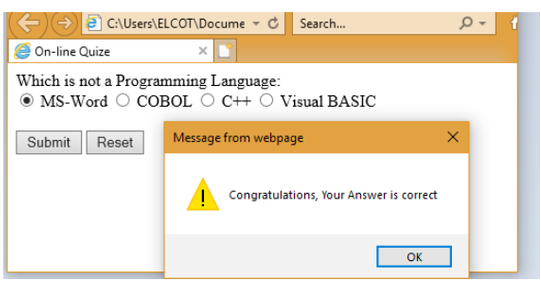

Note:

- The **getElementById()** method returns the element that has the ID attribute with the specified value. (In this example, ID is received from form tag).
- **elements[0]** indicates the first option given in the question (Ms-word)

Chapter 16 Pages 176-183.indd 335 3/20/2020 11:45:08 AM