yoke lines, side seam. Contrast colour piped seam add interest to garments (Figure 12. 5).

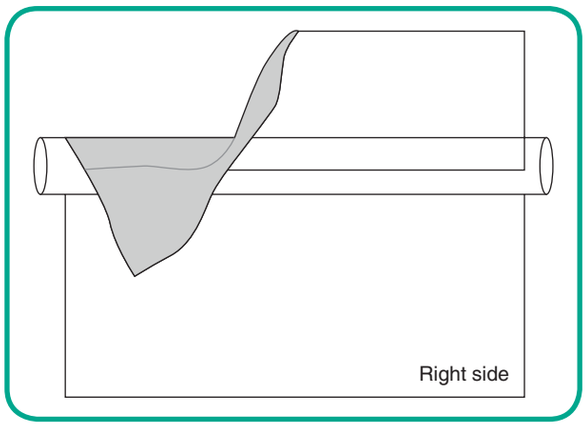


Figure 12.5 **Piped Seam**

Seams can be finished by top stitched. This adds strength and decoration. The methods followed to finish the seams are single and double top stitched seam, welt, lappet seamed and slot seams.

12.1.3 Seam Finishes

Seams have raw edges which tend to ravel out. Therefore the raw edge of seams are finished by different methods like double stitching over cast stitching, herring bone stitch, hem stitching, zig-zag stitch and bound finish.

12.1.3.1 Types of Seam Finishing

When joining two pieces of fabric with a seam its raw edges must also be taken care. They must not ravel or create a fuzzy look. Hence seam finishes play an important role in acquiring a neat completed garment. Seam can be finished by different methods (Figure 12.6). The most common methods are discussed below.

Double Stitched Seam

Double stitched seam is done by sewing another or a second row stitches about 0.25 cm away from the original seam. This can be a straight or a zig zag stitch. This seam is done on curled material where travelling of the seam is higher. *Example*: Knitted Jersey.

Pinked Finish

Pinked finish is given by cutting the edges of the seams with pinking shears. This is a simple and easy method. It does not involve more time, but it is not suitable for material which tend to ravel easily. Example: Satin.

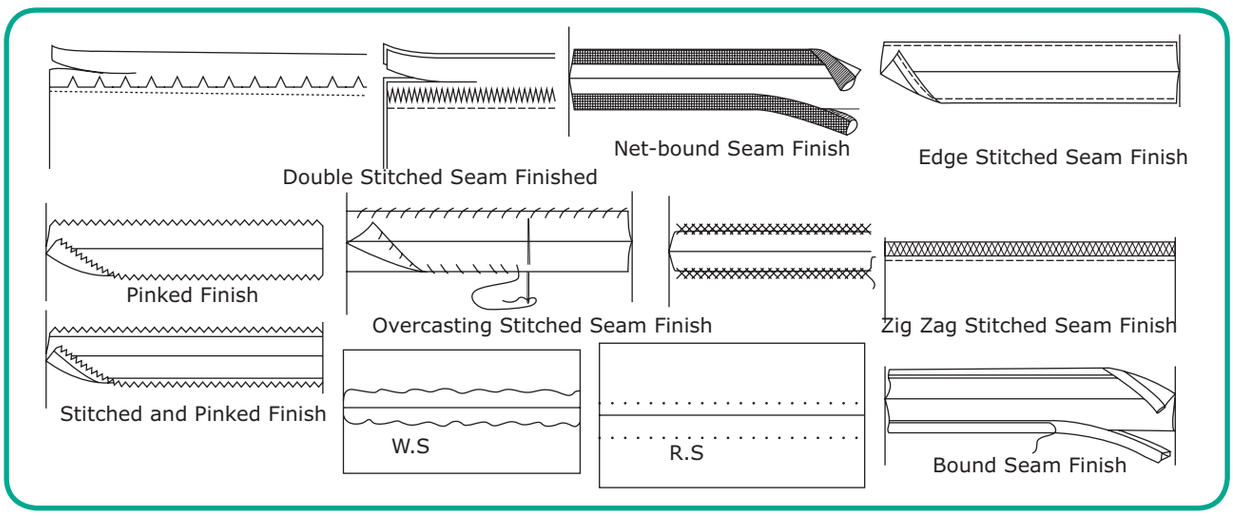


Figure 12. 6 **Seam Finishes**

TDD_Final_Chapter12.indd 114 21-02-2019 12.35.48 PM