in the tension force can be ignored. We can resolve T into horizontal component $T\cos\left(\frac{\theta}{2}\right)$ and vertical component $T\sin\left(\frac{\theta}{2}\right)$. The horizontal components at A and B are equal in magnitude but opposite in direction; therefore, they cancel each other. Since the elemental arc length AB is taken to be very small, the vertical components at A and B appears to acts vertical towards the centre of the arc and hence, they add up. The net radial force F_r is

$$F_r = 2T\sin\left(\frac{\theta}{2}\right) \qquad (11.10)$$

Since the amplitude of the wave is very small when it is compared with the length of the string, $\sin\left(\frac{\theta}{2}\right) \approx \frac{\theta}{2}$. Hence,

$$F_r = 2T \times \frac{\theta}{2} = T\theta \qquad (11.11)$$

But $\theta = \frac{dl}{R}$, we get

$$F_r = T\frac{dl}{R} \qquad (11.12)$$

Applying Newton's second law to the elemental string in the radial direction, under equilibrium, the radial component of the force is equal to the centripetal force. Hence equating equation (11.9) and equation (11.12), we have

$$T\frac{dl}{R} = \mu v^2 \frac{dl}{R}$$


$$v = \sqrt{\frac{T}{\mu}} \qquad (11.13)$$

Observations:

- The velocity of the string is
  a. directly proportional to the square root of the tension force
  b. inversely proportional to the square root of linear mass density
  c. independent of shape of the waves.

EXAMPLE 11.6

Calculate the velocity of the travelling pulse as shown in the figure below. The linear mass density of pulse is 0.25 kg m^{-1}. Further, compute the time taken by the travelling pulse to cover a distance of 30 cm on the string.

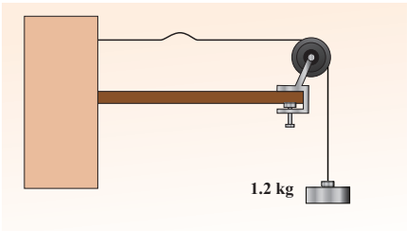

Solution

The tension in the string is $T = mg = 1.2 \times 9.8 = 11.76$ N

The mass per unit length is $\mu = 0.25$ kg m^{-1}

Therefore, velocity of the wave pulse is

$$v = \sqrt{\frac{T}{\mu}} = \sqrt{\frac{11.76}{0.25}} = 6.858\ m\,s^{-1} = 6.8\ m\,s^{-1}$$

The time taken by the pulse to cover the distance of 30 cm is

$t = \frac{d}{v} = \frac{30\times10^{-2}}{6.8} = 0.044\,s = 44\ ms$ where, ms = milli second.

11.3.2 Velocity of longitudinal waves in an elastic medium

Consider an elastic medium (here we assume air) having a fixed mass contained in a long tube (cylinder) whose cross sectional area is *A* and maintained under a pressure *P*. One can generate longitudinal waves in the fluid either by displacing the fluid using a piston or by keeping a vibrating tuning fork at one end of the tube. Let us assume that the direction of propagation of waves coincides with the axis of the cylinder. Let ρ be the density of

UNIT-11(XI-Physics_Vol-2)_14-08-2020.indd 233 17-08-2020 15:30:38