10.10.2 Absolute Addressing

Absolute Addressing is opposite to Relative Addressing. A dollar sign is placed before each column name and row number in an Absolute Addressing, for example, assume **A5** has the formula **=SUM($A$1:$A$3)**, when it is copied to **B5 the** reference will not automatically change and formulae in **B5=SUM($A$1:$A$3)** that is same as **A5.**

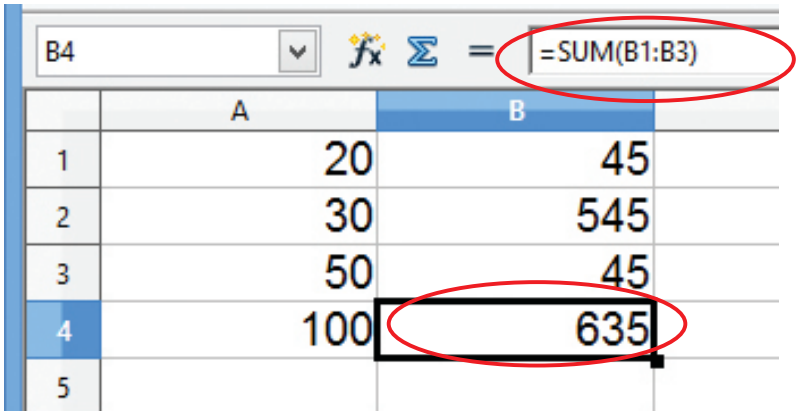


Figure: 10.21 Relative Cells Addressing

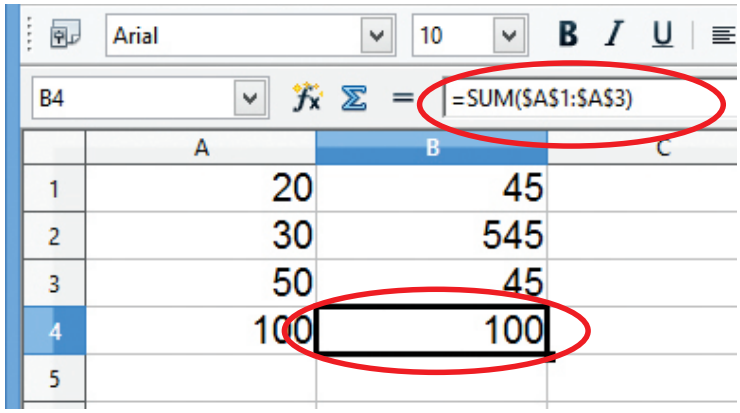


Figure: 10.22 Absolute Cell Addressing

10.11– Functions in OpenOffice Calc

10.11.1 – Introduction

A function is a predefined calculation entered in a cell to help to analyze or manipulate data in a spreadsheet. These functions simplify help to create the formulas needed to get the expected results. Formulae are equations using numbers and variables to get a result. In a spreadsheet, the variables are cell locations that hold the data needed for the equation to be completed. Open Office Calc includes over 350 functions to analyze and reference data. Many of these functions are used for working on numbers, dates, times, and text.