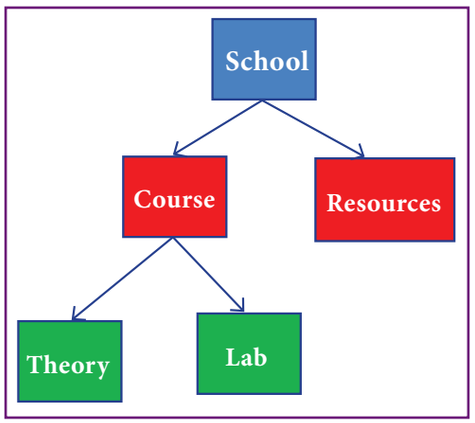

Hierarchical Model Fig. 11.3

2. Relational Model

The Relational Database model was first proposed by E.F. Codd in 1970 . Nowadays, it is the most widespread data model used for database applications around the world.

The basic structure of data in relational model is tables (relations). All the information's related to a particular type is stored in rows of that table. Hence tables are also known as relations in a relational model. A relation key is an attribute which uniquely identifies a particular tuple (row in a relation (table)).

Stu_id	Name	Age
1	Malar	17
2	Suncar	16
3	Velu	16

Subj_id	Name	Teacher
1	C++	Kannan
2	Php	Ramakrishnan
3	Python	Vidhya

Stu_id	Subj_id	Marks
1	1	92
1	2	89
3	2	96

Relational Model
Fig. 11.4

3. Network Model

Network database model is an extended form of hierarchical data model. The difference between hierarchical and Network data model is :

- In hierarchical model, a child record has only one parent node,

XII Std - CS EM Chapter-11.indd 193 1/24/2020 10:09:35 AM