used in the **for** loop of C++ and the *sequence* refers to the initial, final and increment value. Usually in Python, **for** loop uses the *range()* function in the sequence to specify the initial, final and increment values. *range()* generates a list of values starting from **start** till **stop-1.**

**The syntax of range() is as follows:**

range (start,stop,[step])

Where,

start – refers to the initial value

stop – refers to the final value

step – refers to increment value, this is optional part.

**Example 6.8: Examples for range()**

| | |
|---|---|
| range (1,30,1) | *will start the range of values from 1 and end at 29* |
| range (2,30,2) | *will start the range of values from 2 and end at 28* |
| range (30,3,-3) | *- will start the range of values from 30 and end at 6* |
| range (20) | *will consider this value 20 as the end value(or upper limit) and starts the range count from 0 to 19 (remember always range() will work till stop -1 value only)* |

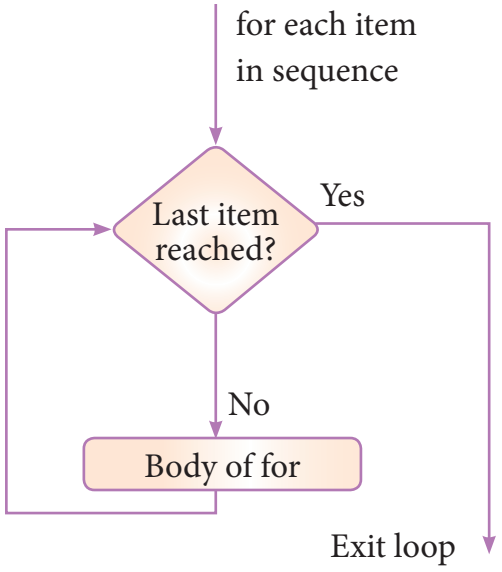


*Fig 6.5 for loop execution*