Output:

```
1
1    2
1    2  3
1    2   3    4
1    2   3    4     5
```

6.2.4 Jump Statements in Python

The jump statement in Python, is used to unconditionally transfer the control from one part of the program to another. There are three keywords to achieve jump statements in Python : **break, continue, pass.** The following flowchart illustrates the use of break and continue.

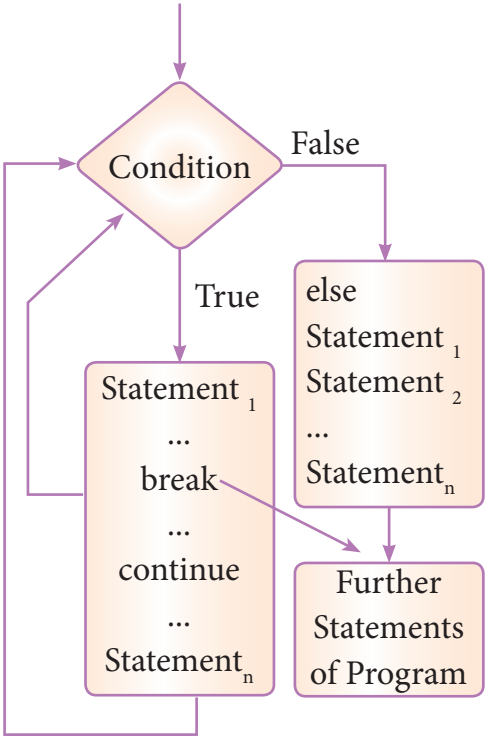

Fig 6.6 Use of break, continue statement in loop structure

(i) break statement

The **break** statement terminates the loop containing it. Control of the program flows to the statement immediately after the body of the loop.

A **while** or **for** loop will iterate till the condition is tested false, but one can even transfer the control out of the loop (terminate) with help of **break** statement. When the break statement is executed, the control flow of the program comes out of the loop and starts executing the segment of code after the loop structure.

If break statement is inside a nested loop (loop inside another loop), break will terminate the innermost loop.