
prevent the user from retriggering the error by clicking the Reload button.

With this code in place, we can rerun our customer's problematic query by entering the following URL:

```
http://localhost:3000/carts/wibble
```

We don't see a bunch of errors in the browser now. Instead, the catalog page is displayed with the error message shown in the following screenshot.

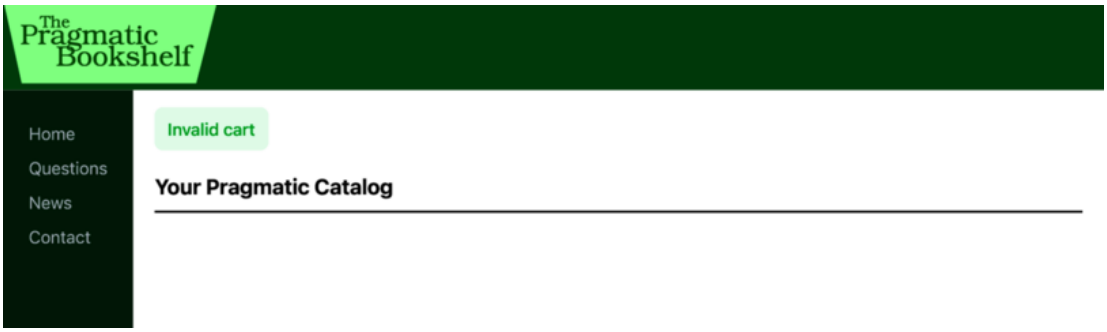

If we look at the end of the log file (`development.log` in the `log` directory), we see our message:

```
Started GET "/carts/wibble" for ::1 at 2024-06-20 19:59:26 -0400
Processing by CartsController#show as HTML
  Parameters: {"id"=>"wibble"}
  ^[[1m^[[36mCart Load (0.4ms)^[[0m  ^[[1m^[[34mSELECT "carts".* FROM
"carts"
  ↳ app/controllers/carts_controller.rb:71:in `set_cart'
Attempt to access invalid cart wibble
Redirected to http://localhost:3003/
Completed 302 Found in 6ms (ActiveRecord: 0.3ms (1 query, 0 cached) | GC:
```

On Unix machines, we'd probably use a command such as `tail` or `less` to view this file. On Windows, you can use your favorite editor. It's often a good idea to keep a window open to show new lines as they're added to this file. In Unix, you'd use `tail -f`. You can download a `tail` command for Windows[55] or get a GUI-based tool.[56] Finally, some OS X users use `Console.app` to track log files. Just say `open development.log` at the command line.