
show. For now, let's add a trivial template that shows the title of each book in the cart. Update the file views/carts/_cart.html.erb like so:

rails7/depot_f/app/views/carts/_cart.html.erb

```
  <div id="<%= dom_id cart %>">
»   <h2 class="font-bold text-lg mb-3">Your Pragmatic Cart</h2>
»
»   <ul class="list-disc list-inside">
»     <% cart.line_items.each do |item| %>
»       <li><%= item.product.title %></li>
»     <% end %>
»   </ul>
  </div>
```

You may be wondering about the underscore in the file name and where the cart variable comes from. Don't worry, we'll cover all this and more when we get to *Partial Templates*, but for now it's enough to know that this is the file that Rails uses to render a single cart.

So, with everything plumbed together, let's go back and click the Add to Cart button again and see our view displayed, as in the next screenshot.

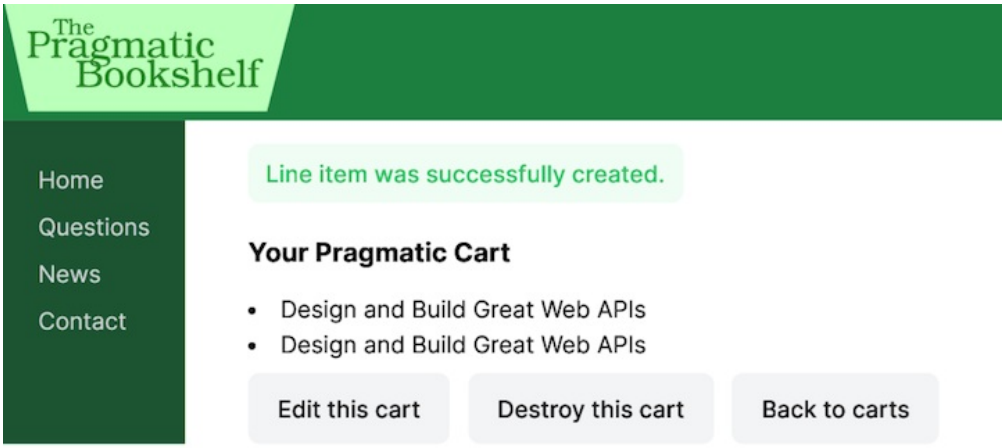

Go back to http://localhost:3000/, the main catalog page, and add a different product to the cart. You'll see the original two entries plus our new item in your cart. It looks like we have sessions working.

We changed the function of our controller, so we know that we need to update the corresponding functional test.