
entering the following URL:

```
http://localhost:3000/carts/wibble
```

We don’t see a bunch of errors in the browser now. Instead, the catalog page is displayed with the error message shown in the following screenshot.

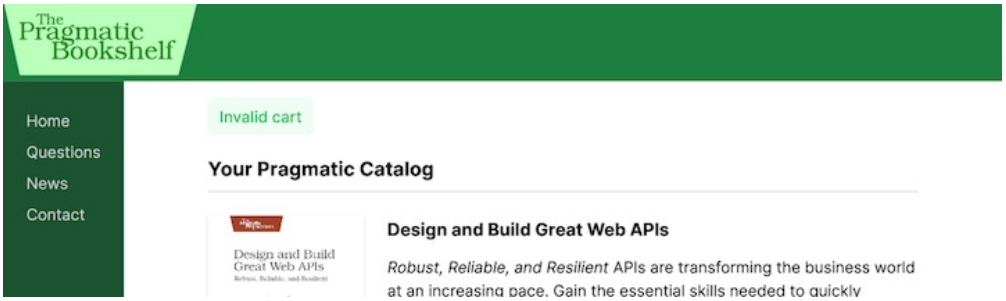

If we look at the end of the log file (**development.log** in the **log** directory), we see our message:

```
Started GET "/carts/wibble" for 127.0.0.1 at 2016-01-29 09:37:39 -0500
Processing by CartsController#show as HTML
  Parameters: {"id"=>"wibble"}
  ^[[1m^[[35mCart Load (0.1ms)^[[0m  SELECT "carts".* FROM "carts" WHERE
"carts"."id" = ? LIMIT 1  [["id", "wibble"]]
» Attempt to access invalid cart wibble
Redirected to http://localhost:3000/
Completed 302 Found in 3ms (ActiveRecord: 0.4ms)
```

On Unix machines, we’d probably use a command such as **tail** or **less** to view this file. On Windows, you can use your favorite editor. It’s often a good idea to keep a window open to show new lines as they’re added to this file. In Unix, you’d use **tail -f**. You can download a **tail** command for Windows[50] or get a GUI-based tool.[51] Finally, some OS X users use **Console.app** to track log files. Just say **open development.log** at the command line.

This being the Internet, we can’t worry only about our published web forms; we have to worry about every possible interface, because malicious crackers can get underneath the HTML we provide and attempt to provide additional parameters. Invalid carts aren’t our biggest problem here; we also want to prevent access to *other people’s carts*.