
```
    line_items.sum { |item| item.total_price }
  end
```

The following screenshot shows a nicer-looking cart.

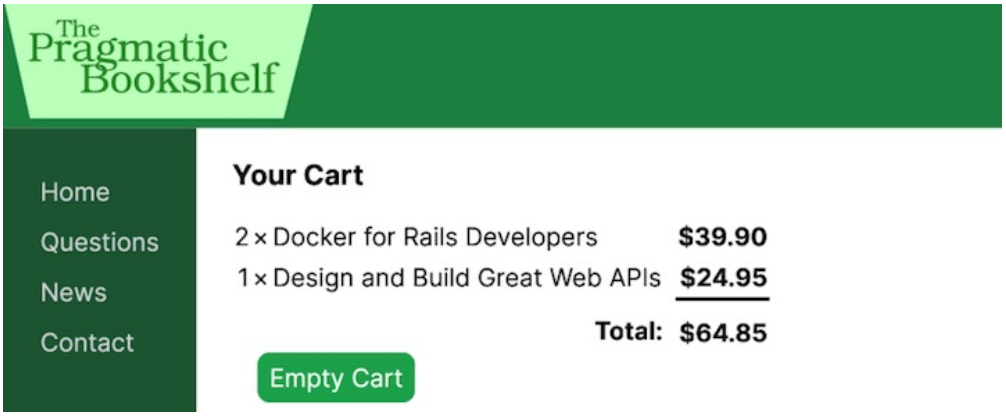

Finally, we update our test cases to match the current output:

rails7/depot_i/test/controllers/line_items_controller_test.rb

```
    test "should create line_item" do
      assert_difference("LineItem.count") do
        post line_items_url, params: { product_id: products(:ruby).id }
      end

      follow_redirect!

»     assert_select 'h2', 'Your Cart'
»     assert_select 'td', "Programming Ruby 1.9"
    end
```

What We Just Did

Our shopping cart is now something the client is happy with. Along the way, we covered the following:

- Adding a column to an existing table, with a default value
- Migrating existing data into the new table format
- Providing a flash notice of an error that was detected
- Using the logger to log events
- Removing a parameter from the permitted list
- Deleting a record
- Adjusting the way a table is rendered, using Tailwind CSS classes