
```
        </nav>

        <main class="container mx-auto mt-4 px-5 flex">
          <%= yield %>
        </main>
      </section>
    </body>
  </html>
```

Does it work? At first, it's hard to tell the difference. But after emptying the cart and adding another book to the cart we see an obviously not-empty cart alongside a message that it currently is empty, as illustrated in the following screenshot.

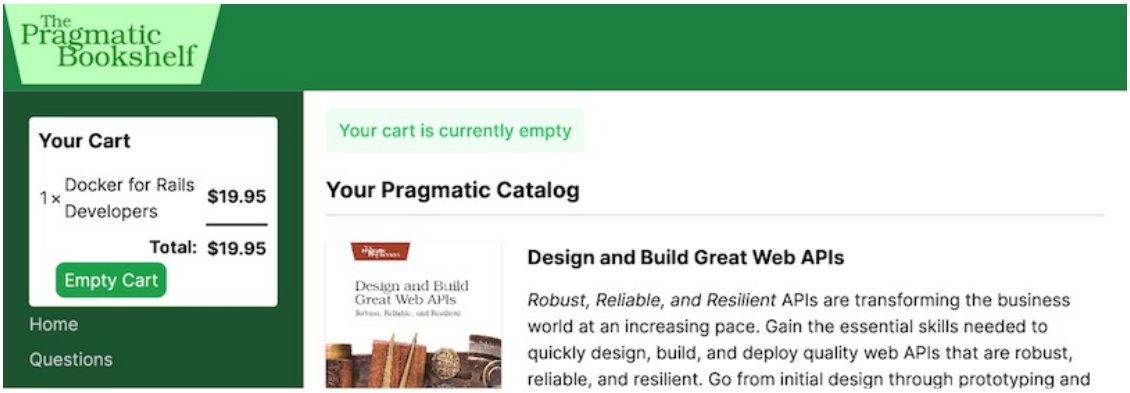

What's going on here is that we updated the cart (Yay!), but didn't update the notice (Boo!). This failure is something agile folks call failing fast and is something to be celebrated. So far in this iteration we literally added one call to `format.turbo_stream` and we got the cart updated dynamically and learned a lot.

What did we learn? Well for starters, we need a partial for every area of the screen that we wish to dynamically update, the HTML in that partial needs to contain a unique HTML ID element, and we need to update the controller to return turbo streams.

Let's apply this to the notice. First, we extract the notice from `app/views/store/index.html.erb` into a separate partial. While we're here, we add an `else` clause to ensure that there always is an HTML element with an ID of `notice` present on the page, even if its content is empty.

rails7/depot_m/app/views/store/_notice.html.erb