
in the form. An alternative would be to have the controller set instance variables.

We also make use of the `label_tag` helpers to create HTML `<label>` tags. This helper also accepts two parameters. The first contains the name of the field, and the second contains the label to be displayed.

See the figure. Note how the value of the form field is communicated between the controller and the view via the `params` hash: the view gets the value to display in the field from `params[:name]`, and when the user submits the form, the new field value is made available to the controller the same way.

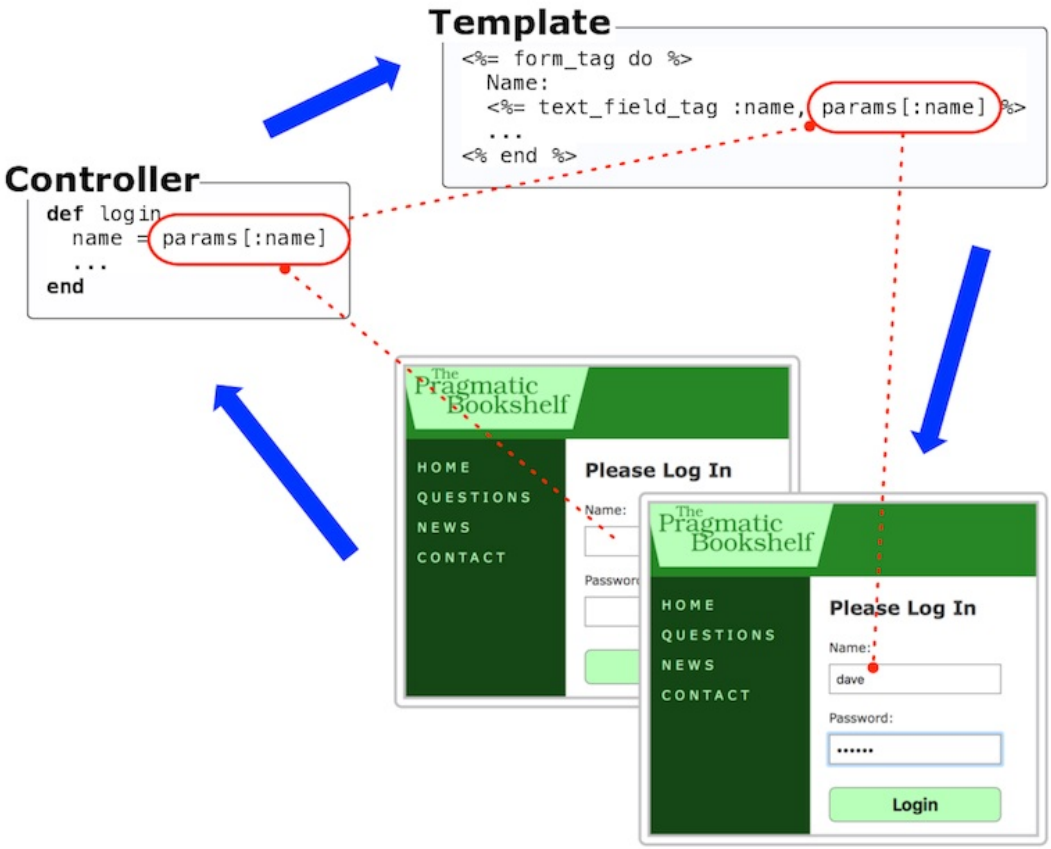

If the user successfully logs in, we store the ID of the user record in the session data. We'll use the presence of that value in the session as a flag to indicate that an administrative user is logged in.

As you might expect, the controller actions for logging out are much shorter:

rails7/depot_r/app/controllers/sessions_controller.rb