
and all the optional parts to the path, the gestalt might be hard to visualize. Never fear—when running a server in development mode, Rails provides a visual aid. All you need to do is navigate to http://localhost:3000/rails/info/routes, and you'll see a list of all your routes. You can even filter the list, as shown in the screenshot, to quickly find the route you're interested in. More information on the fields shown in this table can be found in the description of rake routes.

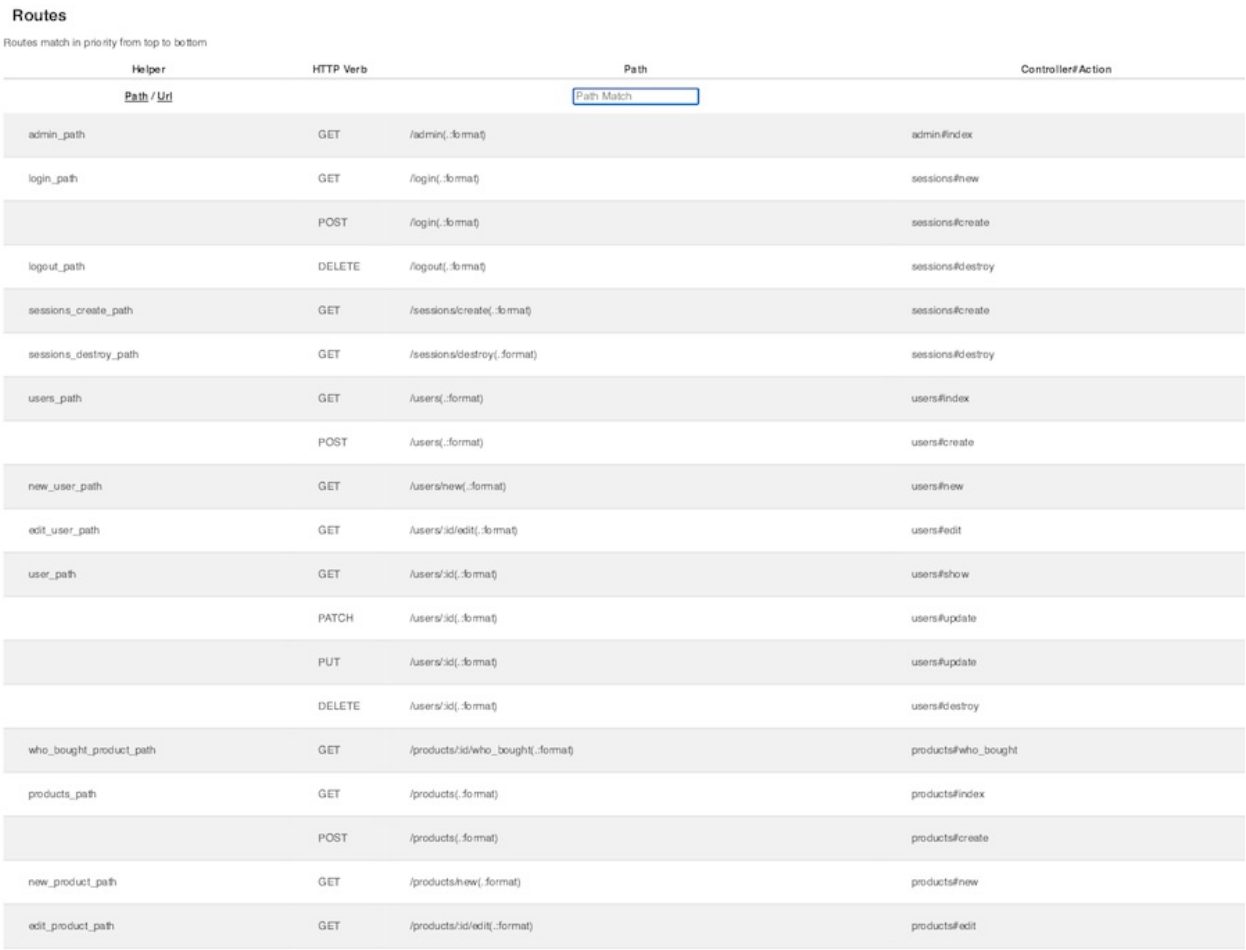

Routes

Routes match in priority from top to bottom

Helper	HTTP Verb	Path	Controller#Action
Path / Url		Path Match	
admin_path	GET	/admin(.:format)	admin#index
login_path	GET	/login(.:format)	sessions#new
	POST	/login(.:format)	sessions#create
logout_path	DELETE	/logout(.:format)	sessions#destroy
sessions_create_path	GET	/sessions/create(.:format)	sessions#create
sessions_destroy_path	GET	/sessions/destroy(.:format)	sessions#destroy
users_path	GET	/users(.:format)	users#index
	POST	/users(.:format)	users#create
new_user_path	GET	/users/new(.:format)	users#new
edit_user_path	GET	/users/:id/edit(.:format)	users#edit
user_path	GET	/users/:id(.:format)	users#show
	PATCH	/users/:id(.:format)	users#update
	PUT	/users/:id(.:format)	users#update
	DELETE	/users/:id(.:format)	users#destroy
who_bought_product_path	GET	/products/:id/who_bought(.:format)	products#who_bought
products_path	GET	/products(.:format)	products#index
	POST	/products(.:format)	products#create
new_product_path	GET	/products/new(.:format)	products#new
edit_product_path	GET	/products/:id/edit(.:format)	products#edit

With the routing in place, we're ready to extract the locale from the parameters and make it available to the application. To do this, we need to create a `before_action` callback. The logical place to do this is in the common base class for all of our controllers, which is `ApplicationController`:

rails7/depot_t/app/controllers/application_controller.rb

```
class ApplicationController < ActionController::Base
```