
Processing Forms

In the figure we can see how the various attributes in the model pass through the controller to the view, on to the HTML page, and back again into the model. The model object has attributes such as `name`, `country`, and `password`. The template uses helper methods to construct an HTML form to let the user edit the data in the model. Note how the form fields are named. The `country` attribute, for example, maps to an HTML input field with the name `user[country]`.

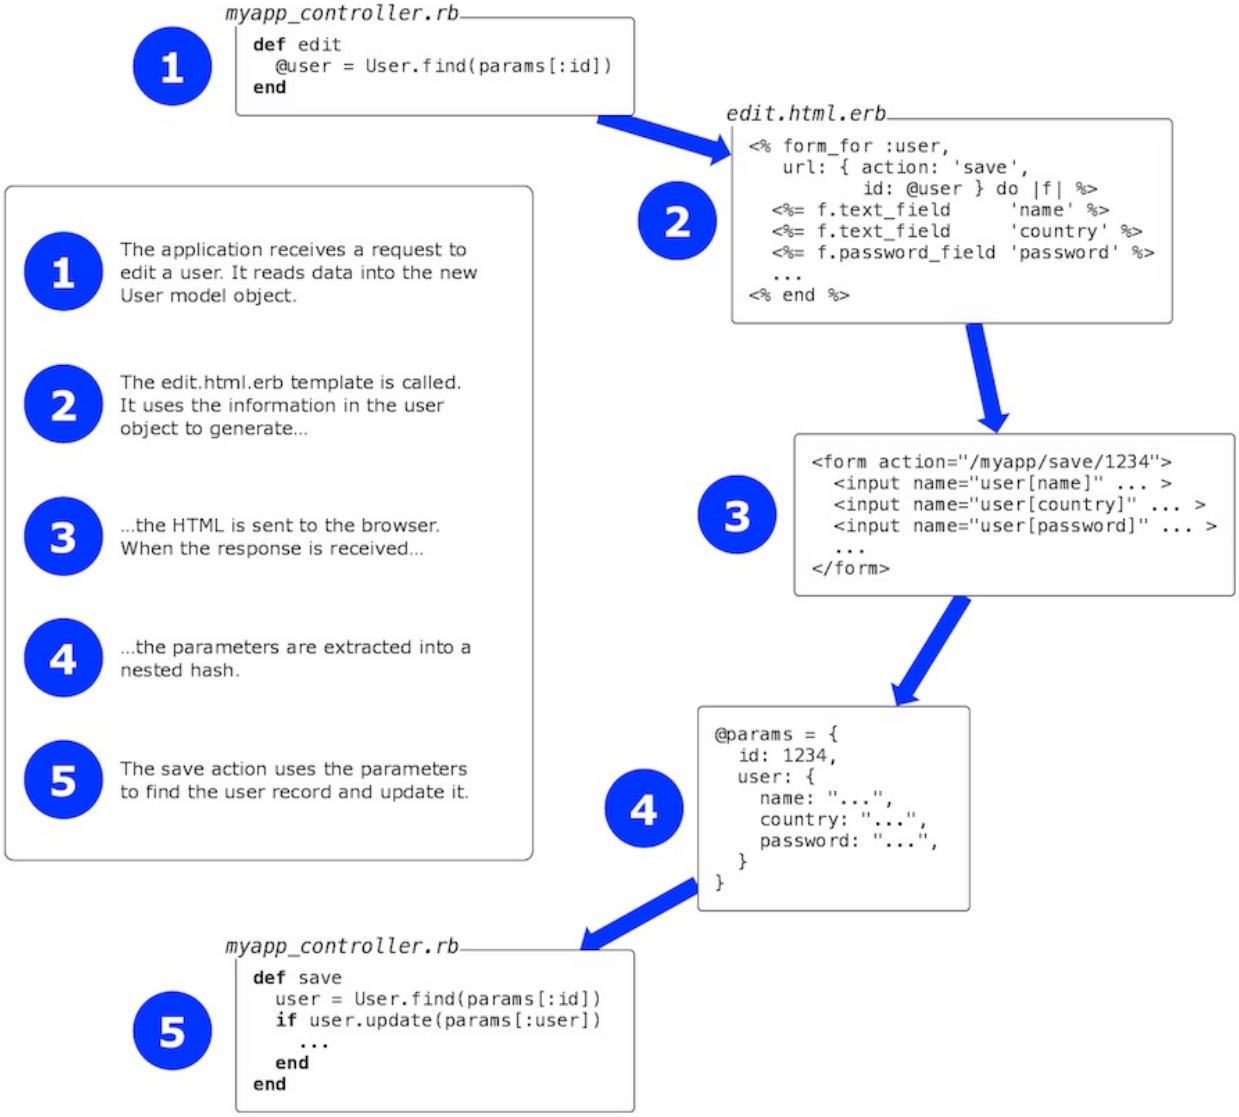

When the user submits the form, the raw POST data is sent back to our application. Rails extracts the fields from the form and constructs the `params`