

In the next section, you will add the ability to create new articles in your application and be able to view them. This is the "C" and the "R" from CRUD: creation and reading. The form for doing this will look like this:

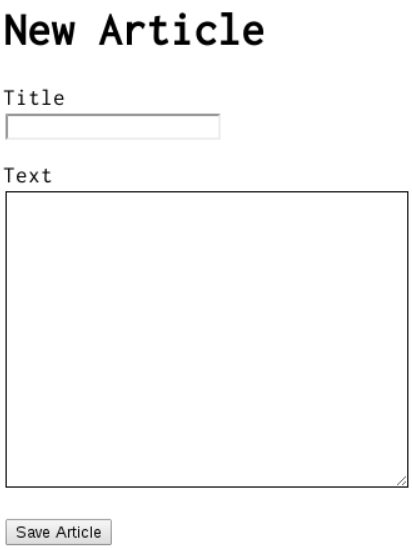

It will look a little basic for now, but that's ok. We'll look at improving the styling for it afterwards.

5.1 Laying down the ground work

Firstly, you need a place within the application to create a new article. A great place for that would be at `/articles/new`. With the route already defined, requests can now be made to `/articles/new` in the application. Navigate to http://localhost:3000/articles/new and you'll see a routing error:

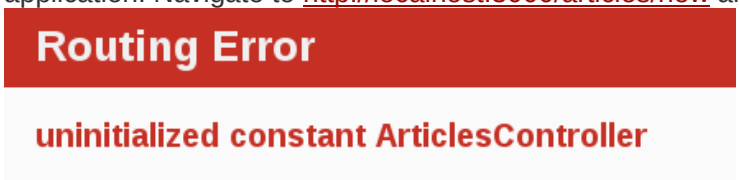

This error occurs because the route needs to have a controller defined in order to serve the request. The solution to this particular problem is simple: create a controller called `ArticlesController`. You can do this by running this command:

```
$ bin/rails g controller articles
```

If you open up the newly generated `app/controllers/articles_controller.rb` you'll see a fairly empty controller:

```
class ArticlesController < ApplicationController
end
```

A controller is simply a class that is defined to inherit from `ApplicationController`. It's inside this class that you'll define methods that will become the actions for this controller. These actions will perform CRUD operations on the articles within our system.

There are `public`, `private` and `protected` methods in Ruby, but only `public` methods can be actions for controllers. For more details check out Programming Ruby.

If you refresh http://localhost:3000/articles/new now, you'll get a new error: