AND FUNCTION

The AND function enables simultaneous evaluation of multiple conditions and returns a **TRUE** result **IF** all the requirements are fulfilled; otherwise, any conditions not met will lead to a FALSE return.

Here's a quick rundown of how the AND function works:


The **AND** function syntax of

AND (logical1, [logical2], ...)

logical1, and logical2, are the conditions you enter in the formula to test.

For Example,

=AND(B3>=5, C2=>10)

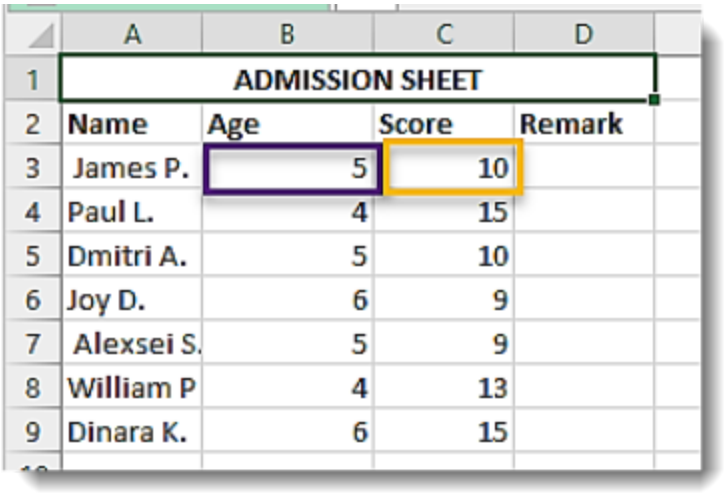

	A	B	C	D
1	ADMISSION SHEET			
2	Name	Age	Score	Remark
3	James P.	5	10	
4	Paul L.	4	15	
5	Dmitri A.	5	10	
6	Joy D.	6	9	
7	Alexsei S.	5	9	
8	William P	4	13	
9	Dinara K.	6	15	

This formula returns **TRUE** if the value in cell **B3** is greater than and equal to **5** and the value in cell **C3** is greater than and equal to **10**.

Using the AND function, you can only test a maximum of 255 multiple conditions to return either a TRUE or FALSE result.