
When **testing more than one condition**, the **AND** function returns a TRUE result IF all conditions given are met; otherwise, it will return FALSE.

You can also create more complex formulas by adding the **AND** function in conjunction with other functions, such as the IF function. When creating a complex formula, do well using a parenthesis to separate each section of the functions.

For example, an **Admission Sheet** has a condition that the age of the applicant must be equal to or above 5 years, **AND** the person must score above or equal to 10.

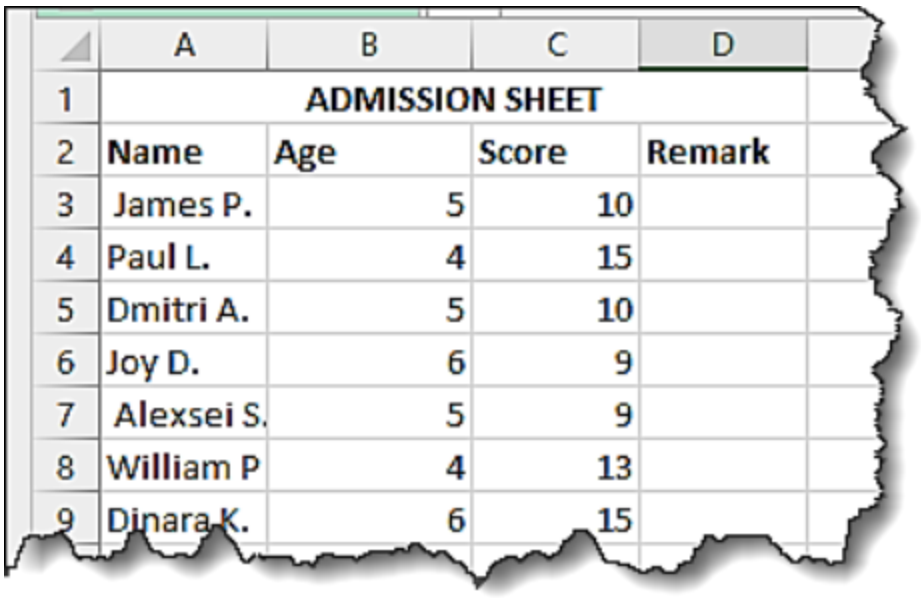

	A	B	C	D
1	ADMISSION SHEET			
2	Name	Age	Score	Remark
3	James P.	5	10	
4	Paul L.	4	15	
5	Dmitri A.	5	10	
6	Joy D.	6	9	
7	Alexsei S.	5	9	
8	William P	4	13	
9	Dinara K.	6	15	

The complex formula will include a **IF AND** Function interpreted in the format below;

=IF (AND(AGE>=5,Score>=10), Admitted, Not Qualify)

For every opened parenthesis, you must have a closed one

The parenthesis opened after the **IF** is closed by the last parenthesis.