5.2.1 Indexed Arrays

An array is defined using the keyword "array". Each element of line array is assigned on index values which commences from O and ends with n-1. The user can access the array element using the assname followed by index value.

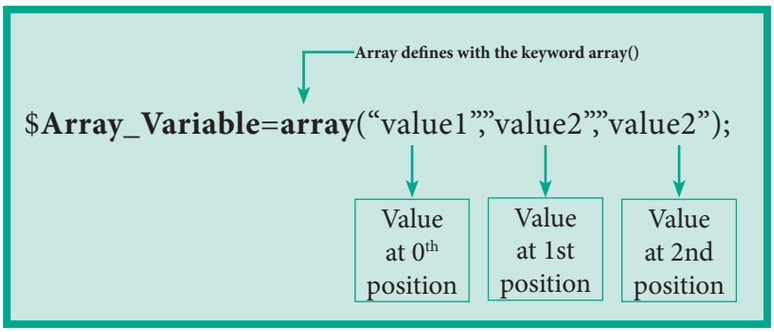


Figure 5.1 Indexed Arrays

Example:

```
<?php
$teacher_name=array("Iniyan", "Kavin", "Nilani");
echo "The students name are " . $teacher_name[0] . ", " . $$teacher_name[1] . " and " .
$teacher_name[2] . ".";
?>
```

5.2.2 Associative Arrays

Associative arrays are a key-value pair data structure. Instead of storing data in a linear array, with associative arrays you can store your data in a collection and assign it a unique key which you may use for referencing your data.

SYNTAX:

Array Syntax:

An Array is defined ().

Associative Arrays Syntax

array(***key*=>*value*,*key*=>*value*,*key*=>*value*,*etc.*);

key = Specifies the key (numeric or string)

value = Specifies the value

Example:

```
<?php
$Marks=array("Student1"=>"35","Student2"=>"17","Student3"=>"43");
echo "Student1 mark is" . $Marks['Student1'] . " is eligible for qualification";
echo "Student2 mark is" . $Marks['Student2'] . " is not eligible for qualification";
?>
```


XII CompApp_English version CHAPTER 05.indd 101 23-02-2020 11:28:25