Client Side Validation:

Before sending the data to server side program (PHP) the programmer can write few validations from browser in the client machine. For this validation, we have to add additional "required" attribute in HTML input tag. Refer Figure 8.3.

Example:

<input> required Attribute in HTML

```
<form action="welcome.php">
 Username: <input type="text"
name="name" required>
 <input type="submit">
</form>
```

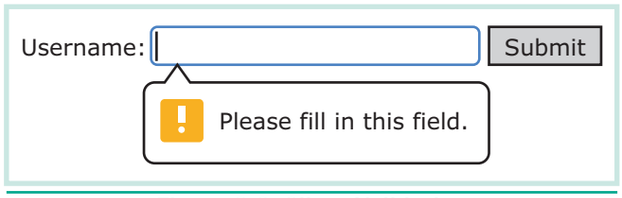


Figure 8.3 Client Validation

8.2 Files

File handling is an important activity of all web application development process. Files are processed for different tasks using the following events:

- PHP Open a File,
- PHP Read a File,
- PHP Close a File,
- PHP Write a File,
- PHP Appending a File and
- PHP uploading a File.

PHP Open a File

fopen() is a system function available in PHP. This function helps to open a file in the server. It contains two parameters one for the file and the other one specifies in which mode the file should be opened (Read/Write).

Syntax:

$file_Object= fopen("FileName", "Read/WriteMode") or die("Error Message!");

Example:

```
<?php
$myfile = fopen("Student.txt", "r") or die("Unable to open file!");
?>
```

PHP Read a File:

The fread() function reads from an open file. The file object comes from fopen function.

Syntax:

fread($file_Object,filesize("FileName"));

XII CompApp_English version CHAPTER 08.indd 122 23-02-2020 11:49:44