EDIFACT subsets

Due to the complexity, branch-specific subsets of EDIFACT have been developed. These subsets of EDIFACT include only the functions relevant to specific user groups.

Example:

CEFIC - Chemical industry

EDIFURN - furniture industry

EDIGAS - gas business

EDIFACT Structure

EDIFACT is a hierarchical structure where the top level is referred to as an interchange, and lower levels contain multiple messages. The messages consist of segments, which in turn consist of composites. The final iteration is a data element. See Figure 18.5 and 18.6

Segment Tables

Segment table lists the message tags. It contains the tags, tag names, requirements designator and repetitation field. The requirement designator may be mandatory (M) or conditional (C). The (M) denotes that the segment must appear atleast once. The (C) denotes that the segment may be used if needed. e.g. C10 indicates repetitions of a segment or group between 0 and 10.

Position	Tag	Name	Req	Rept
0010	UNH	Message Header	M	1
0020	BGM	Beginning of Message	M	1
0030	BUS	Business Function	C	1
0040	DTM	Date/Time/Period	M	4
0060	RFF	Reference	M	1
0070	DTM	Date/Time/Period	C	1
0080	FTX	Free Text	C	5
0090	PAI	Payment Instructions	C	1
0100	FCA	Financial Charges Allocation	C	1
0120	MOA	Monetary Amount	M	1
0130	CUX	Currencies	C	1
0140	DTM	Date/Time/Period	C	2
0150	RFF	Reference	C	1
	etc.			
	etc.			

EDI Interchange

Interchange is also called as envelope. The top level of EDIFACT structure is Interchange. An interchange may contain multiple messages. It starts with UNB and ends with UNZ

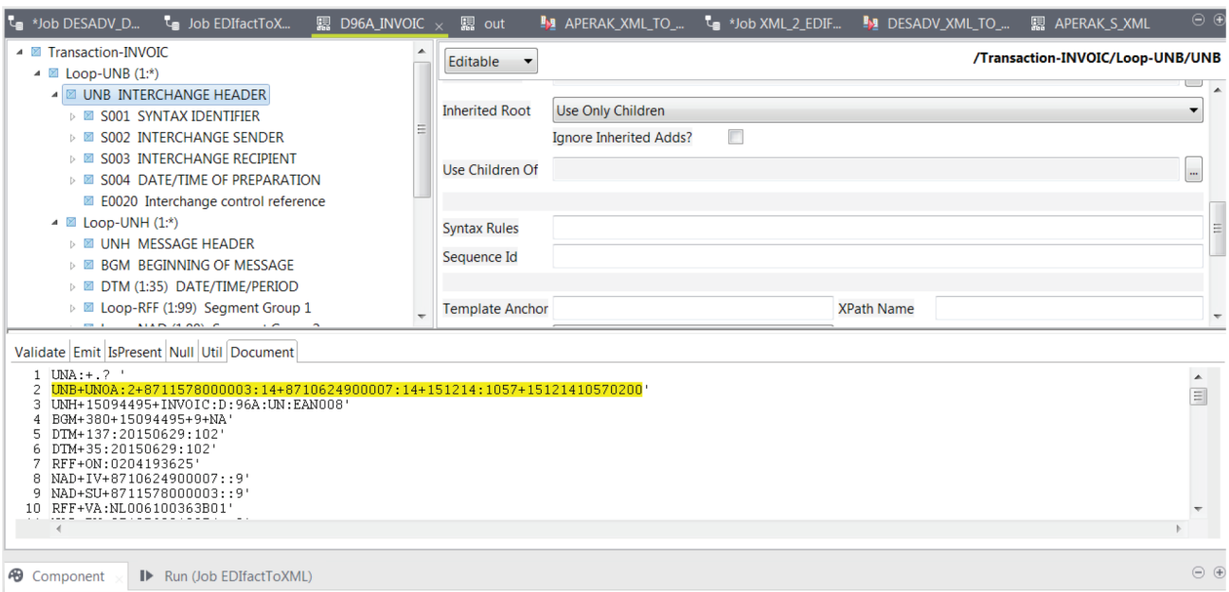


Figure 18.5 Sample EDI Application

XII CompApp_English version CHAPTER 18.indd 257 23-02-2020 15:20:54