Client Server Architecture Model

Client server architecture shown above in Figure 4.2 is classified into three types, as follows

- Single Tier Architecture
- Two Tier Architecture
- N/Multi/Three tire architecture

Single Tier Architecture

This architecture is used for the server, accessed by client. The client application runs inside the server machine itself. This acts as a single layer interaction as in Figure 4.3.

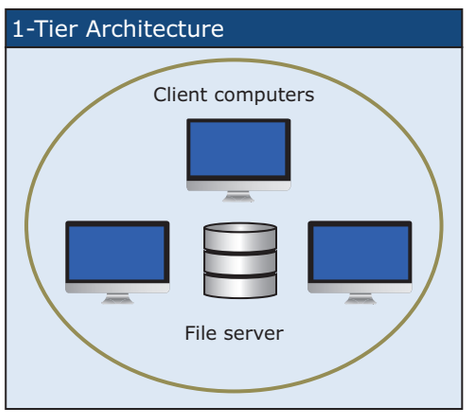


Figure 4.3 Single Tier Architecture

Two Tier Architecture

This architecture is used for the server, accessed by client as two layer interactions. Such as Client layer in tire one and server layer in tire Two. Refer Figure 4.4

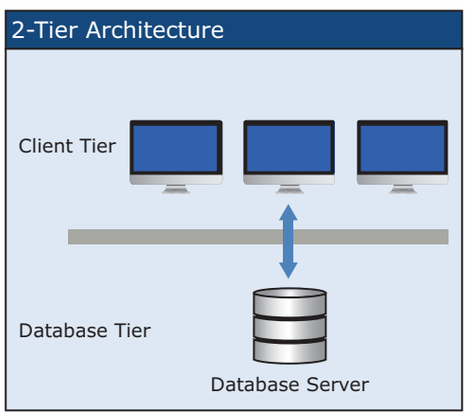


Figure 4.4 Two- Tier Architecture

Multi/Three Tier Architecture:

This architecture is used for the server, accessed by client through more than one layer interaction. The programmer could decide the count of business logic layers according to the software requirement that is the reason this model is also known as Multi three Tire Architecture as shown in Figure 4.5.

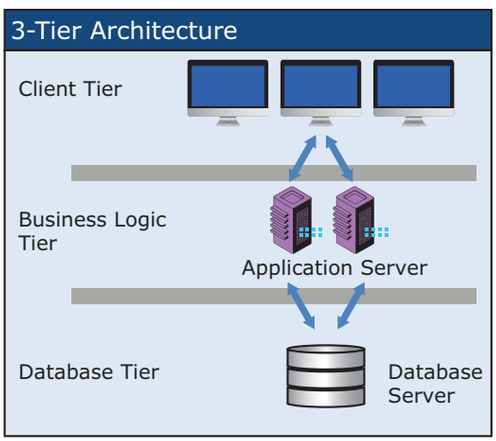


Figure 4.5 Multi/Three- Tier Architecture

Most of the server side scripting languages are working on any one the client server architecture model. Webserver is software which is running in server hardware. It takes the responsibilities for compilation and execution of server side scripting languages.

4.4 Server side scripting language

Web scripting languages are classified into two types, client side and server side scripting language. PHP is completely different from Client side scripting language like Java script. The PHP code entirely executes on Webserver which is installed in the remote machine and it is generating HTML code which is sent to the user. The user receives the HTML code

XII CompApp_English version CHAPTER 04.indd 86 23-02-2020 11:23:37