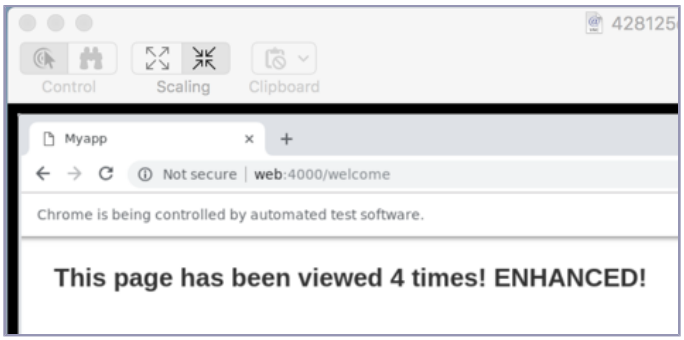


Headless Browsing

Being able to see our tests running is a useful option to have. We typically need it when something isn't working as expected and we want to see what's actually happening. However, most of the time we don't care about seeing the tests run—we just want them to run as fast as humanly (or is that computerly) possible. For that reason, we typically run our system specs in *headless* mode, without a browser window actually being displayed. Without the overhead of driving a real UI, the tests can run a lot faster.

To achieve this, let's register a second driver in spec/support/capybara.rb for running Selenium Chrome in headless mode:

```
require "selenium/webdriver"

Capybara.register_driver :selenium_chrome_in_container do |app|
  Capybara::Selenium::Driver.new app,
    browser: :remote,
    url: "http://selenium_chrome:4444/wd/hub",
    desired_capabilities: :chrome
end

Capybara.register_driver :headless_selenium_chrome_in_container do |app|
  Capybara::Selenium::Driver.new app,
    browser: :remote,
    url: "http://selenium_chrome:4444/wd/hub",
    desired_capabilities: Selenium::WebDriver::Remote::Capabilities.chrome(
      chromeOptions: { args: %w(headless disable-gpu) }
    )
end
```

The new Capybara driver definition is virtually identical to the first; the only difference is we specify the headless and disable-gpu when starting Chrome. Note that we also had to require selenium/webdriver since we need to use the Selenium::WebDriver::Remote::Capabilities class.