
Clean Up the Android Packages

Android uses *packages* to modularize and namespace code. When we created our app, we set the default package to `com.masilotti.hikingjournal`. Each package mirrors a directory on the file system, similar to how folders work in Xcode.

In Android Studio, create a new package by right-clicking `com.masilotti.hikingjournal` and selecting New and then Package.

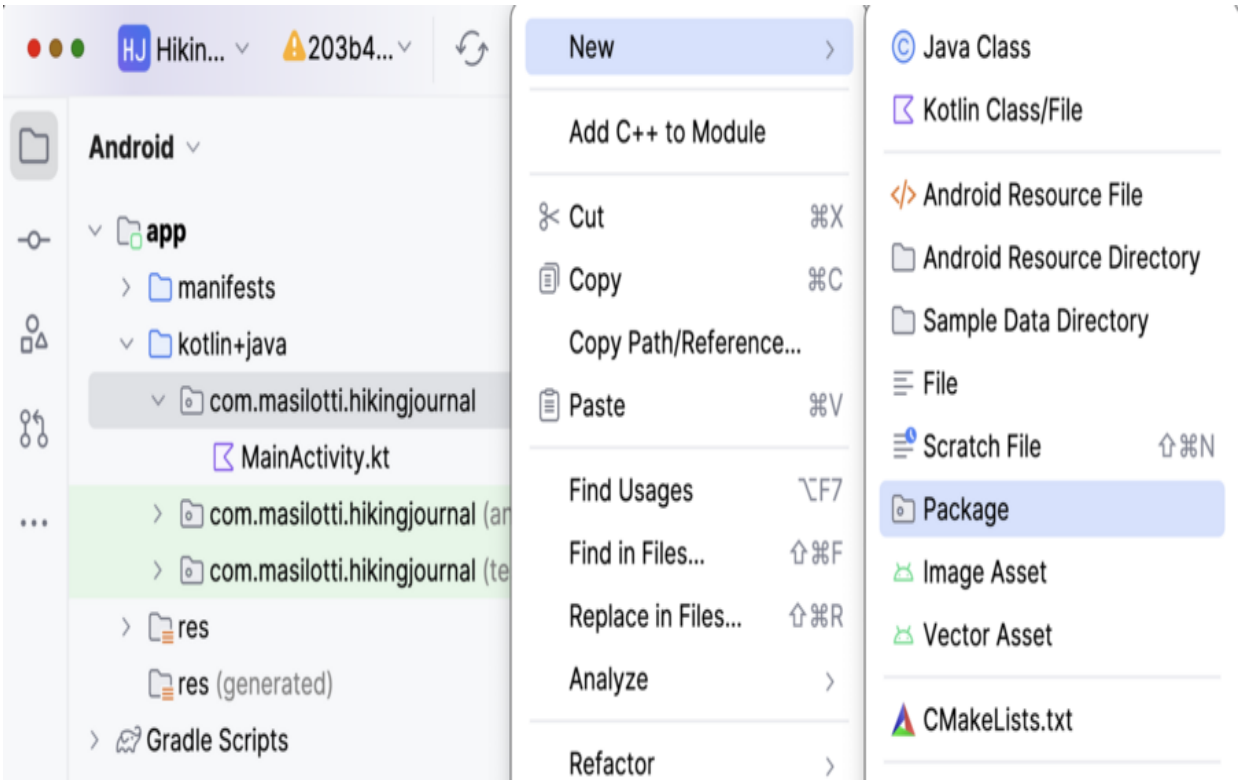

To match our naming conventions of the iOS app, inspired by Rails, name the package `com.masilotti.hikingjournal.activities`. Then drag `MainActivity.kt` inside the new package. Click OK in the dialog to automatically update any references to the file's new location.