
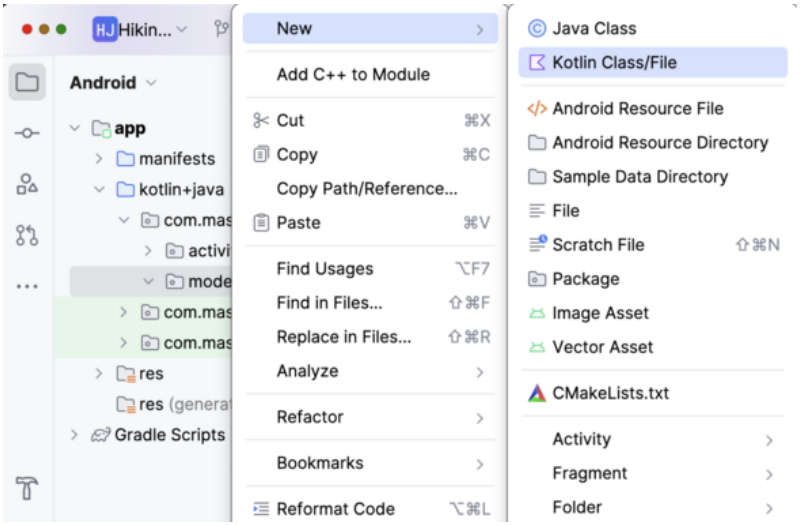


In the next dialog, enter “Tabs” for the name of the file, select File class, and hit Enter.

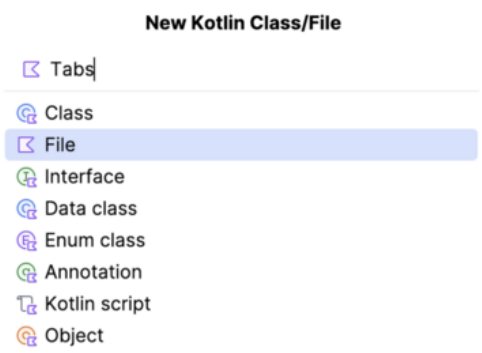

In this new file, create two private `HotwireBottomTab` variables, one for each link in the navigation bar. Set each `navigatorHostId` to match each `FragmentContainerView` via its `android:id` in the layout file.

ch04_12/android/app/src/main/java/com/masilotti/hikingjournal/models/Tabs.kt

```
package com.masilotti.hikingjournal.activities.models

import com.masilotti.hikingjournal.R
import com.masilotti.hikingjournal.activities.baseURL
import dev.hotwire.navigation.navigator.NavigatorConfiguration
import dev.hotwire.navigation.tabs.HotwireBottomTab

private val hikes = HotwireBottomTab(
    title = "Hikes",
    iconResId = android.R.drawable.ic_menu_mapmode,
```