2. The Stimulus controller subclass—where messages are passed between web and native.


3. The native component—where Swift/Kotlin generates the UI and interacts with native APIs.

Stimulus.js



If you aren't comfortable working with Stimulus, then now is a good time to brush up on the basics. I recommend reading through the official handbook[41] before moving on.

This chapter walks through building a native button component to submit forms and navigate to new pages. Here is an example of what the sign-in screen will look like before (left) and after (right) working through this chapter:

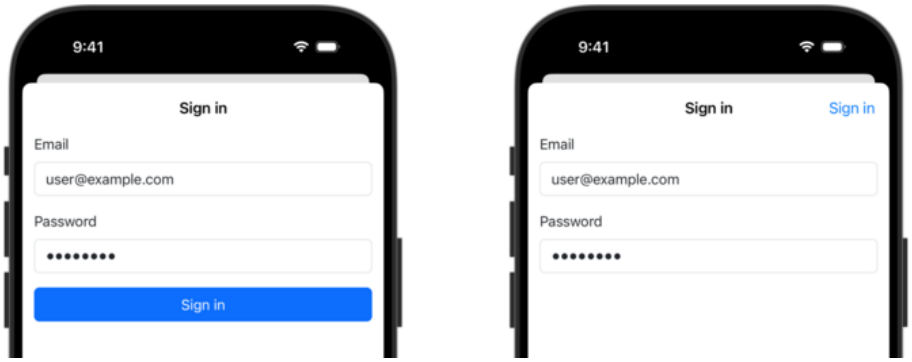

In this chapter, you'll build the iOS bridge component with Swift. But before you can do that, you need to configure the server.