ch07_11/ios/App/Components/ButtonComponent.swift


```
    import HotwireNative
    import UIKit

    class ButtonComponent: BridgeComponent {
        override class var name: String { "button" }

        override func onReceive(message: Message) {
»           let button = UIBarButtonItem(title: "Sign in")
»
»           let viewController = delegate?.destination as? UIViewController
»           viewController?.navigationItem.rightBarButtonItem = button
        }
    }
```

To add native elements to the screen, we needed a reference to a `UIViewController`. `delegate.destination` provided us with just the hook we needed—all we had to do was cast it to a controller.

Run the app and click the Sign in button at the bottom of the screen. On the sign-in screen, the new native component will appear in the upper right.

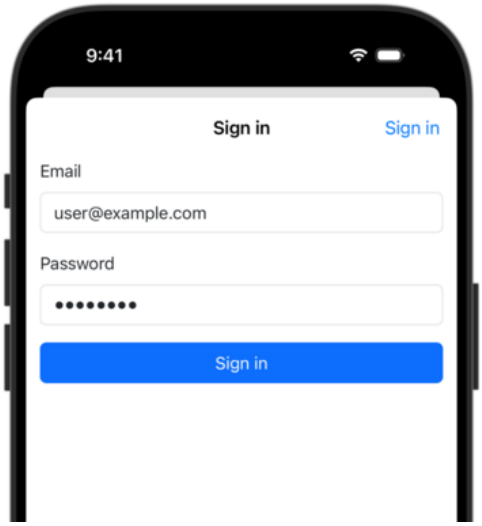

Too bad it doesn’t do anything! We’ll fix that next.

But before we move on, this is a good checkpoint to stop and reflect. You now have the three building blocks of a bridge component: the HTML